


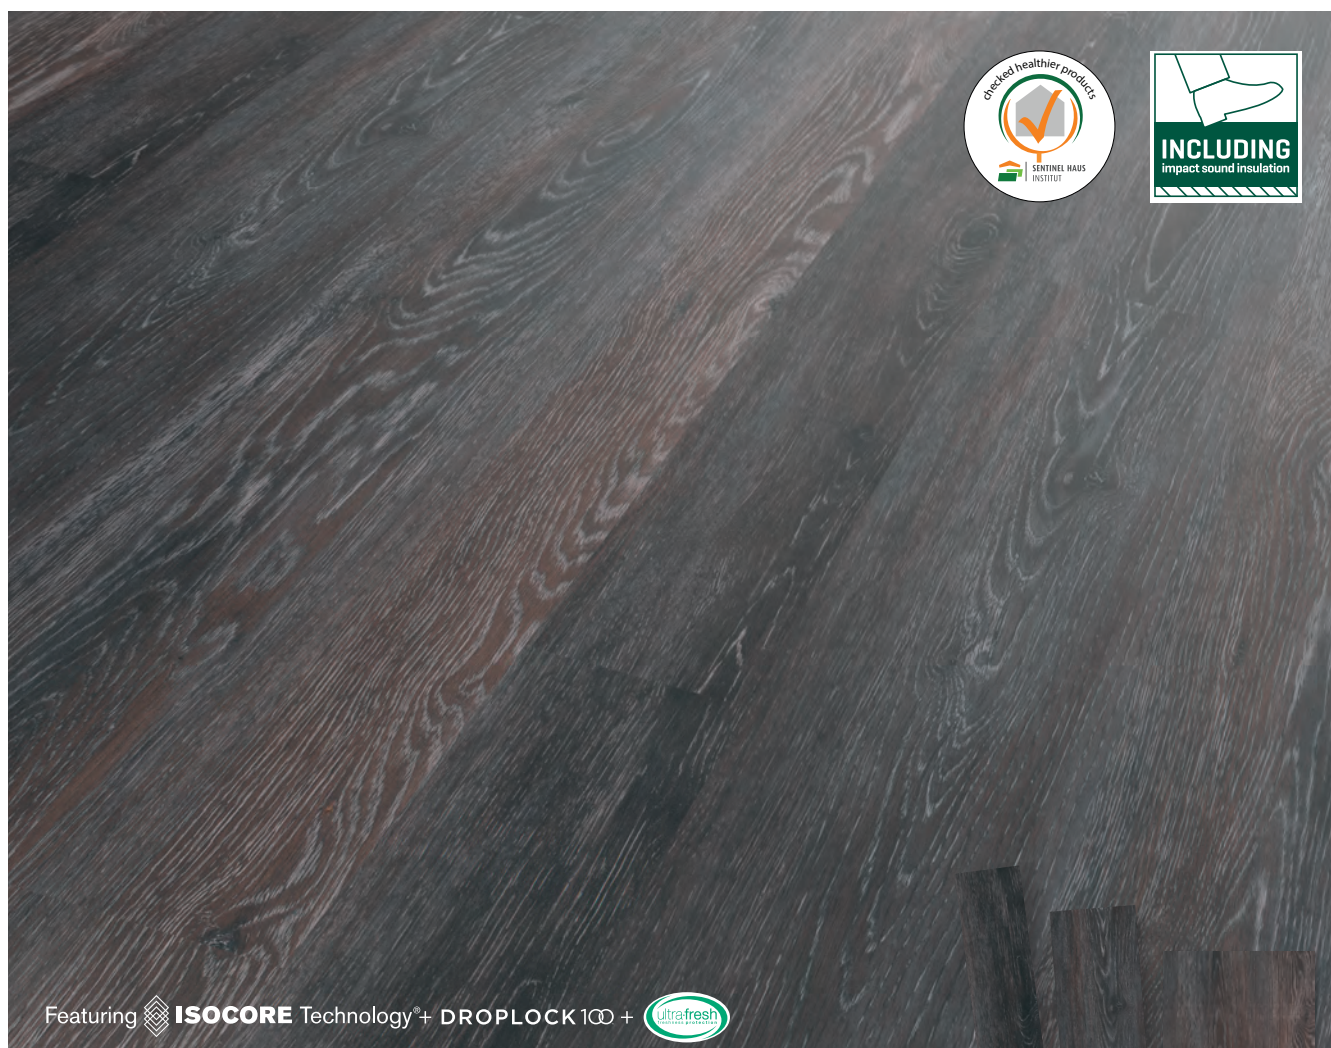

Featuring  **ISOCORE** Technology® + **DROPLOCK 100** + 

The pictures may differ in color
from the original product.

CAMBRIDGE OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I953113	106202802	SLY 1:2:3, Cambridge Oak, 7,5 mm	7640165921920	48

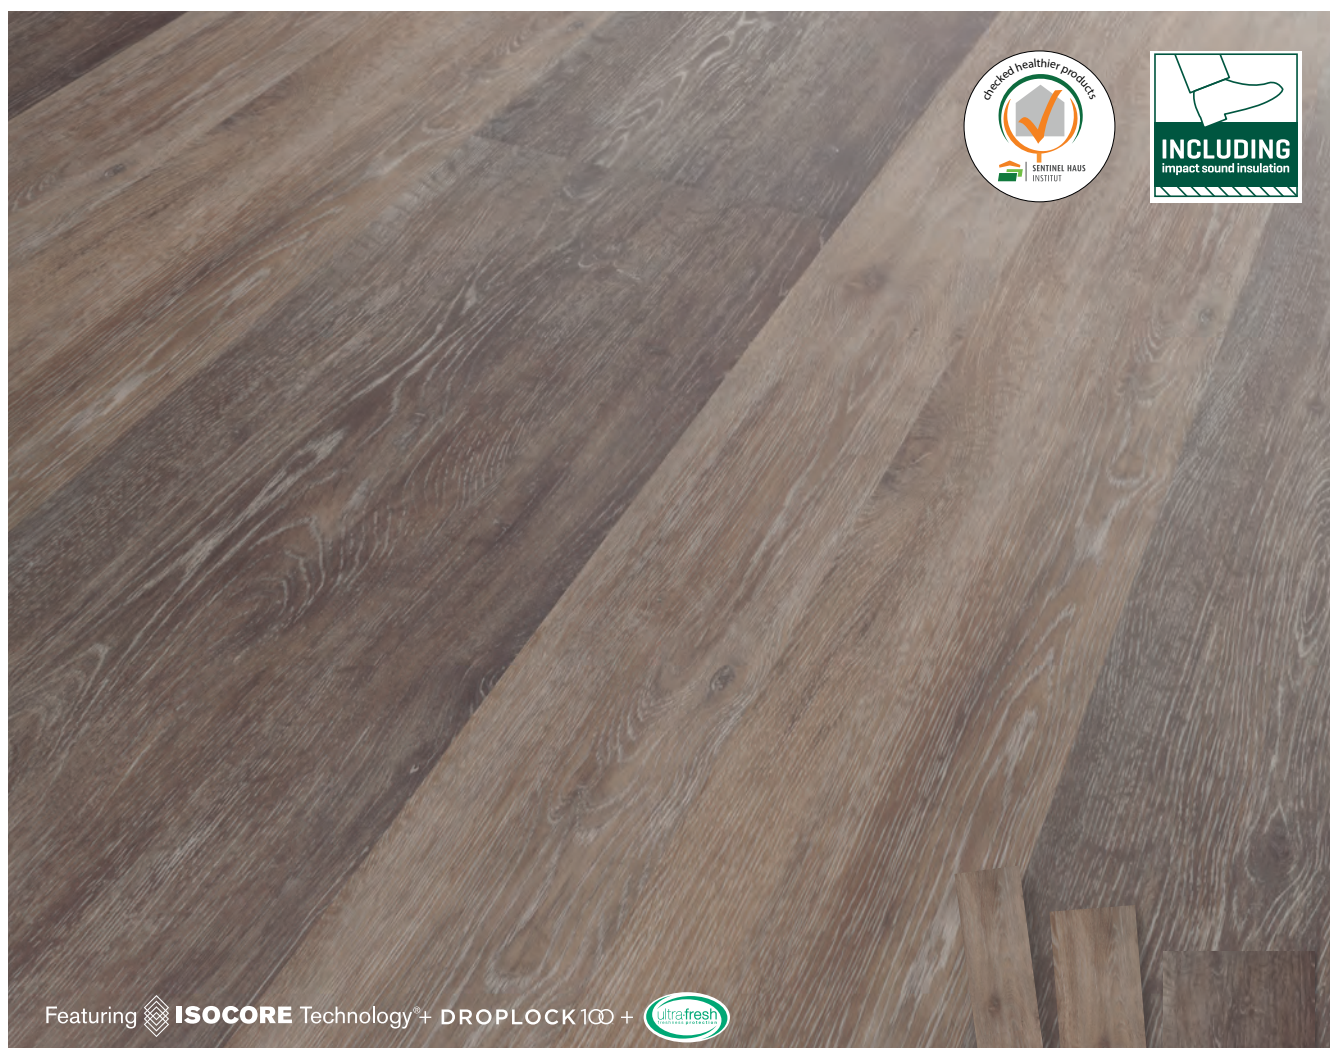

Featuring  **ISOCORE** Technology*+ **DROPLOCK 100** + 

The pictures may differ in color
from the original product.

OXFORD OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I95317	106202804	SLY 1:2:3, Oxford Oak, 7,5 mm	7640165921944	48



The pictures may differ in color
from the original product.

HARVARD OAK

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I128213	106202806	SLY 1:2:3, Harvard Oak, 7,5 mm	7640165921951	48

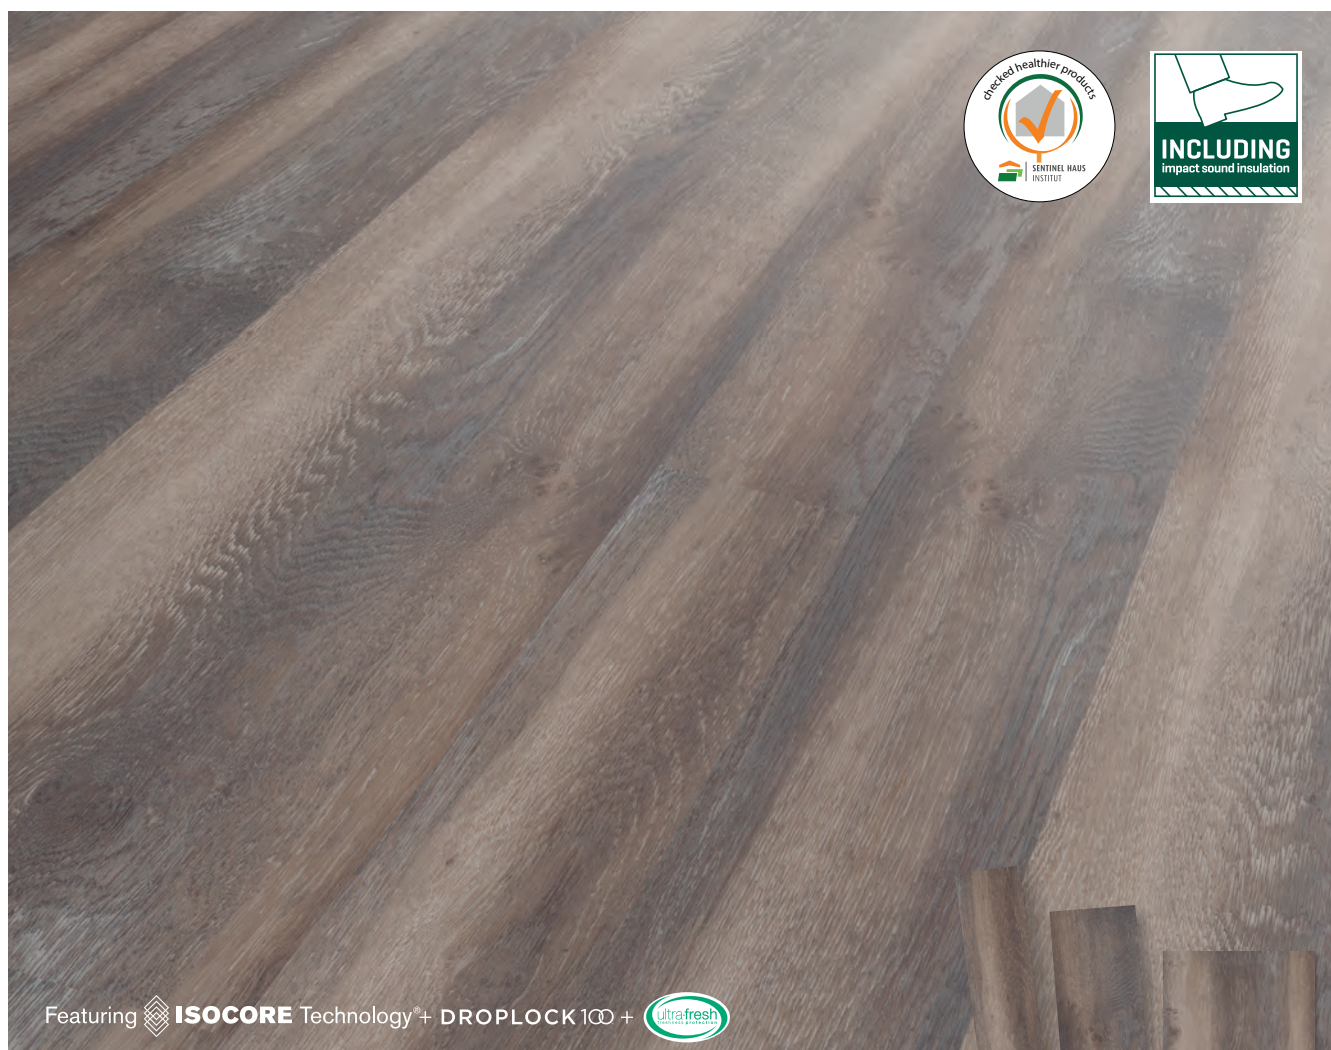

Featuring  **ISOCORE** Technology® + **DROPLOCK 100** + 

The pictures may differ in color
from the original product.

YALE OAK

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I128211	106202808	SLY 1:2:3, Yale Oak, 7,5 mm	7640165921937	48