


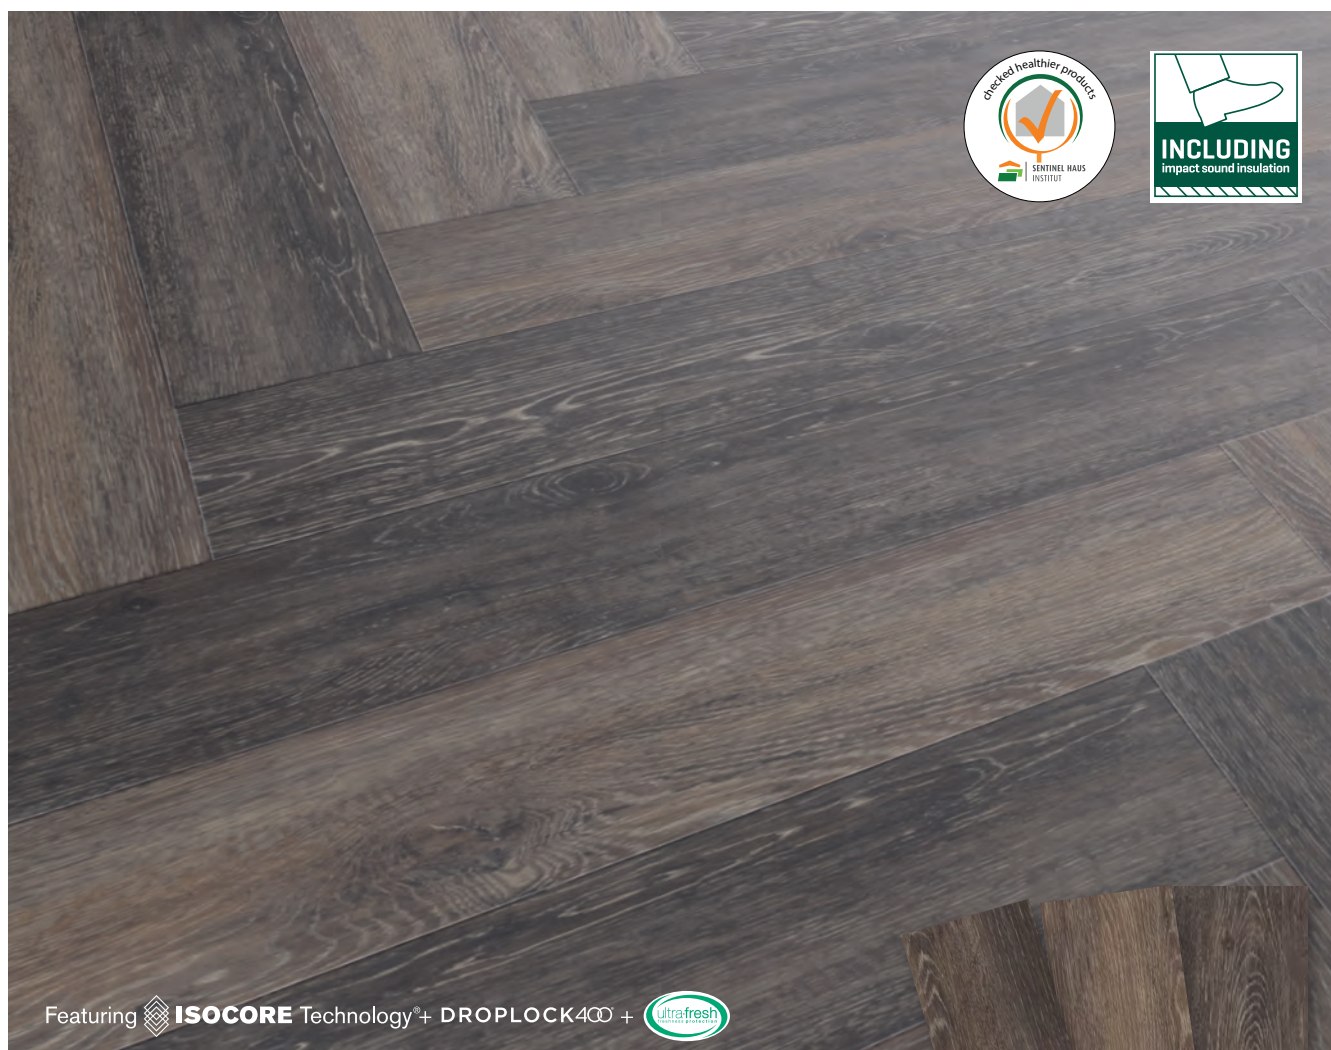

The pictures may differ in color
from the original product.

LORRAINE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB953112	106202961	SLY Herringbone, Lorraine, 8 mm	7640165926536	36

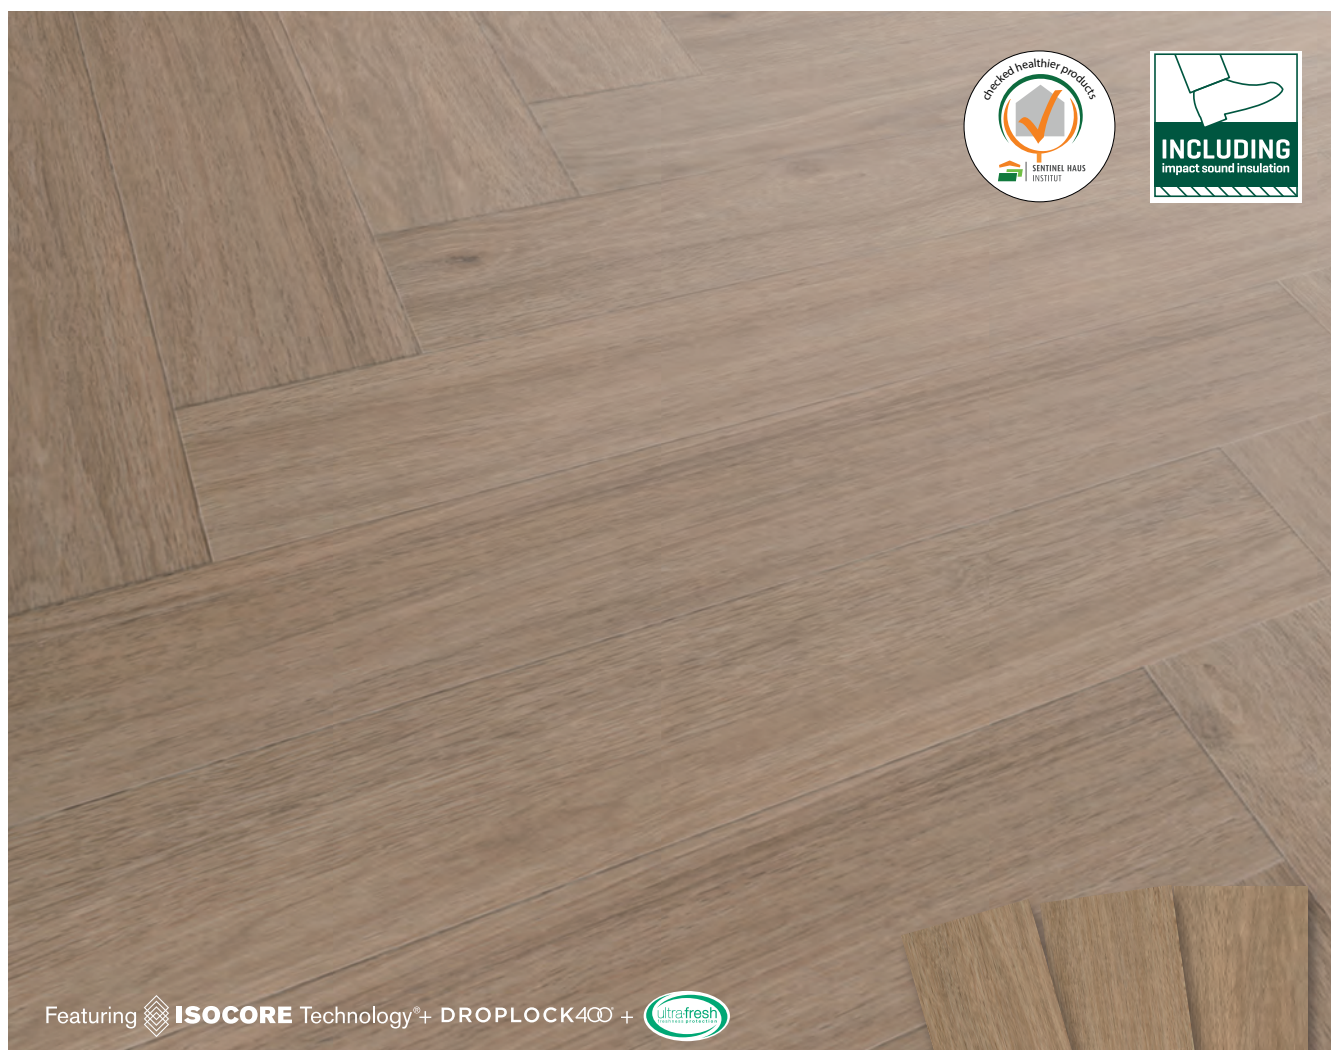

Featuring  **ISOCORE** Technology® + **DROPLOCK400** + 

The pictures may differ in color from the original product.

BRETAGNE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHBO11117	106202963	SLY Herringbone, Bretagne, 8 mm	7640165926543	36

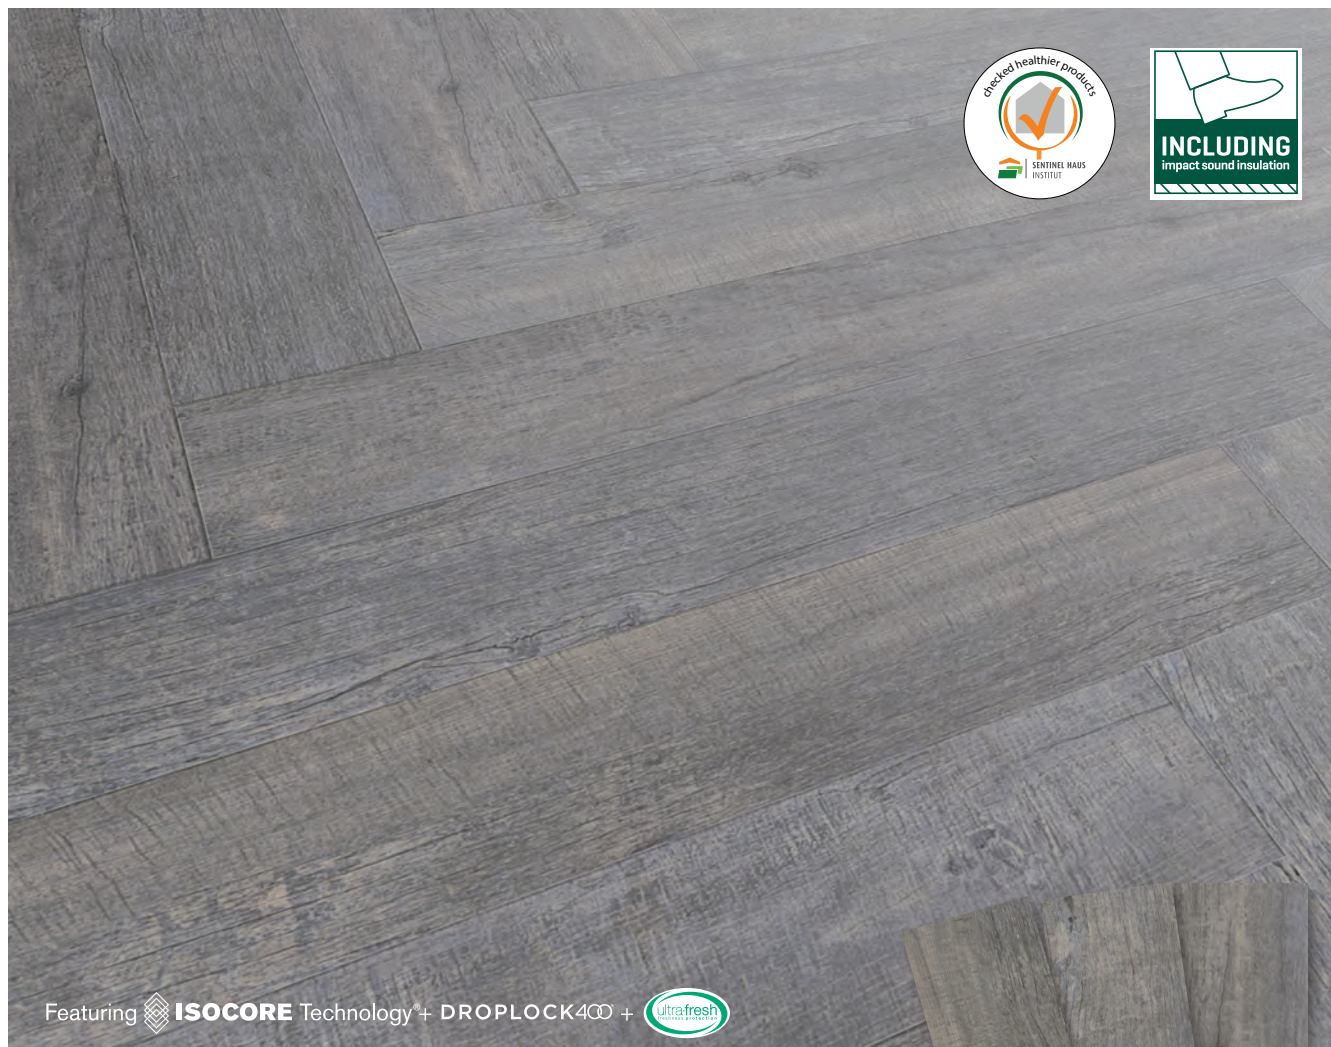

Featuring  **ISOCORE** Technology* + **DROPLOCK400** + 

The pictures may differ in color from the original product.

CORSE

- ◇ Natural wood look (Sawcut)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB1128519	106202965	SLY Herringbone, Corse, 8 mm	7640165926550	36

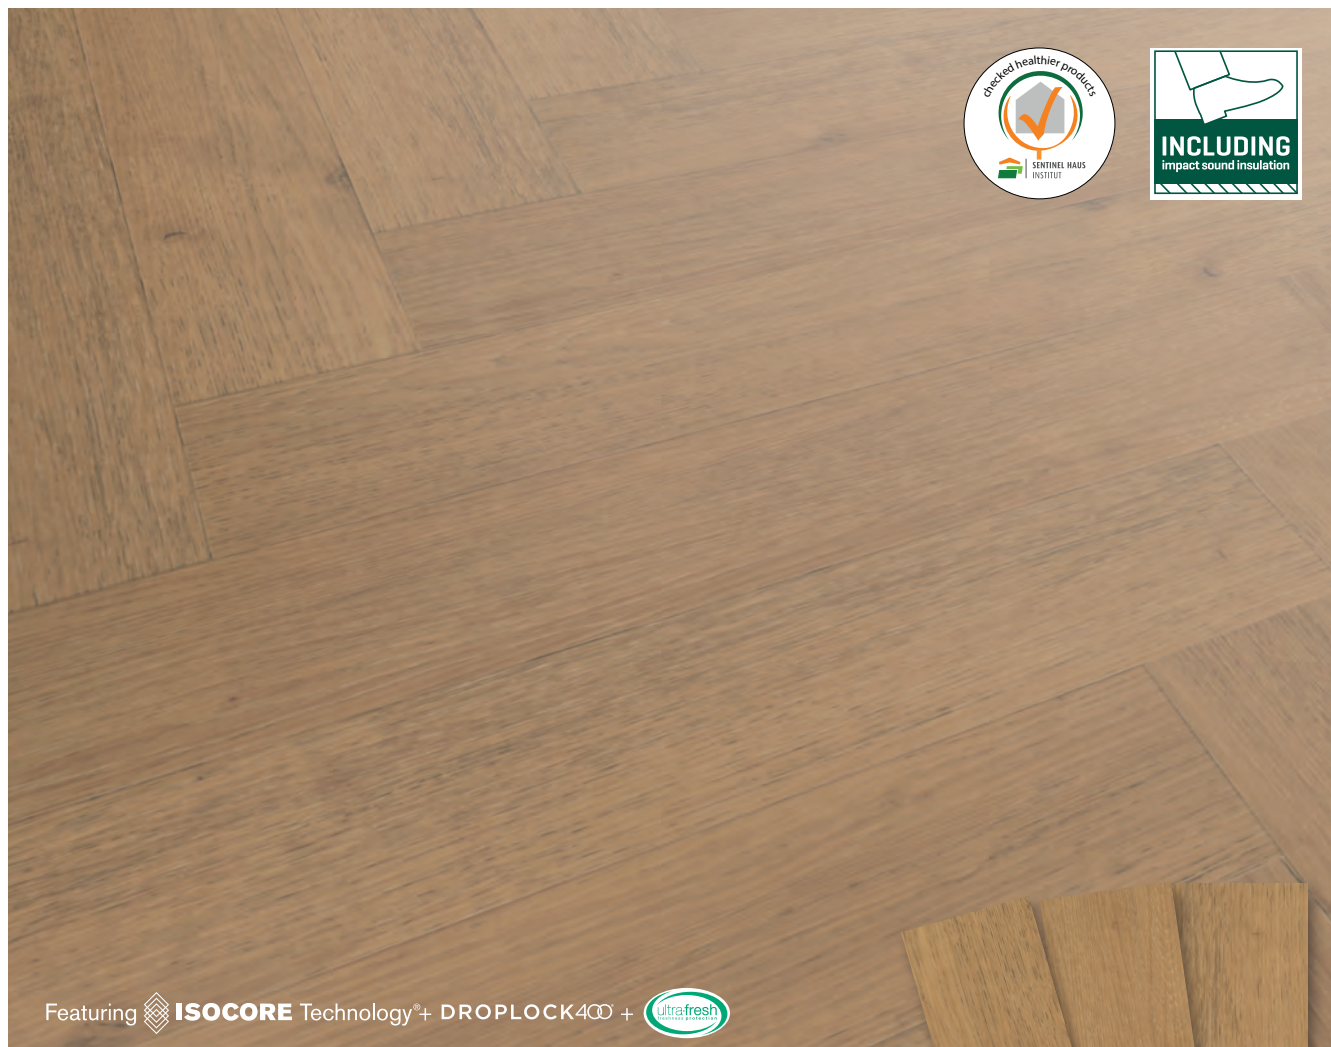

Featuring  **ISOCORE Technology[®]+** **DROPLOCK400** + 

The pictures may differ in color
from the original product.

NORMANDIE

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB1275117	106202967	SLY Herringbone, Normandie, 8 mm	7640165926567	36

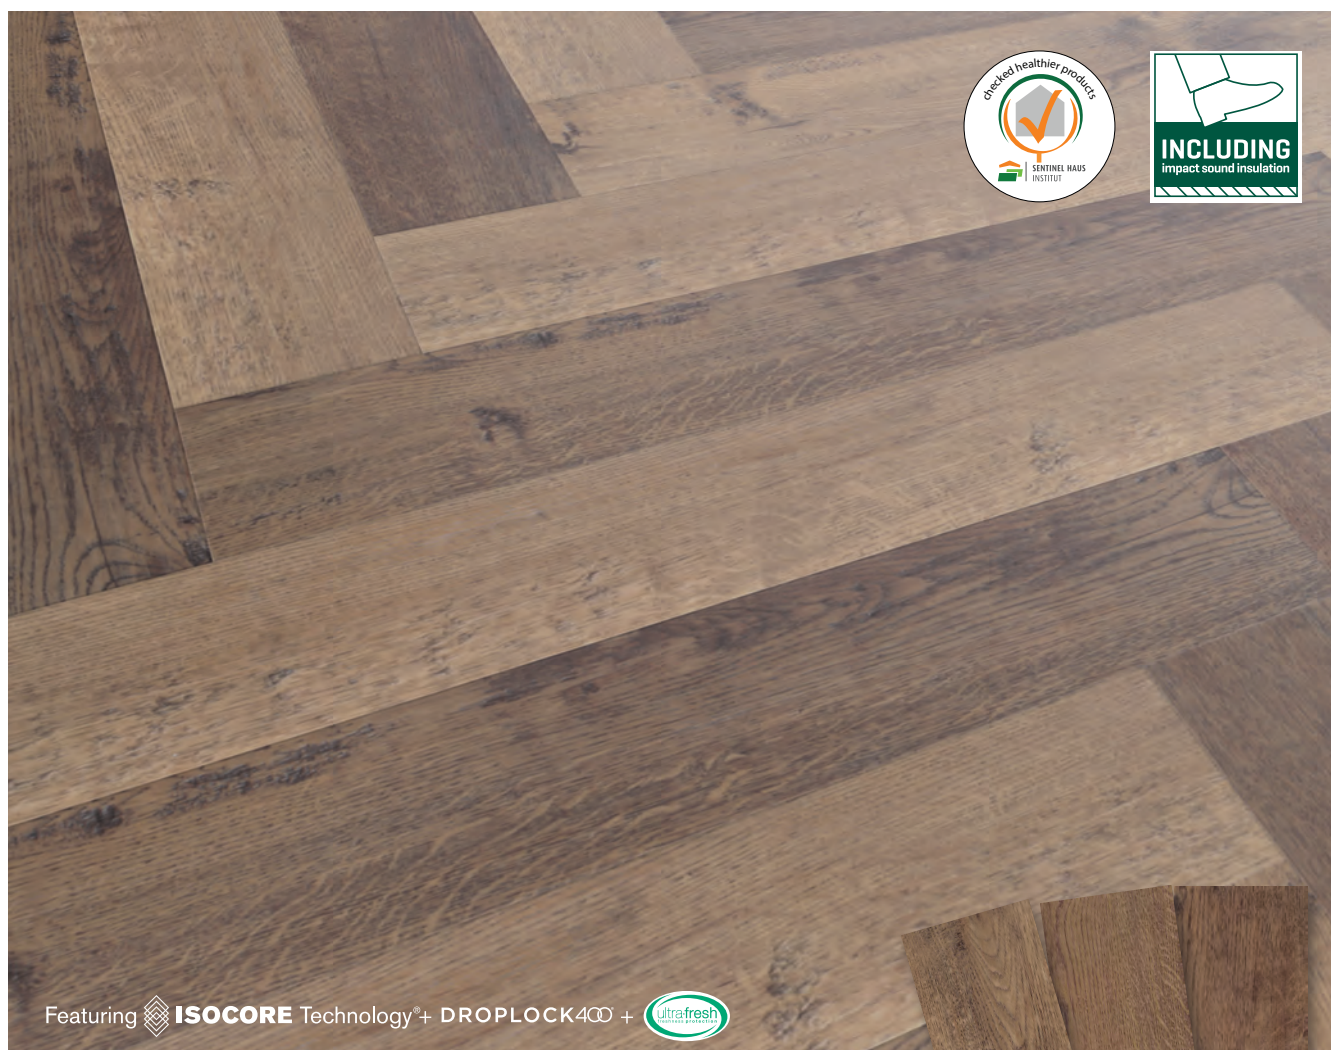

Featuring  **ISOCORE** Technology® + **DROPLOCK400** + 

The pictures may differ in color from the original product.

ALSACE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB129415	106202969	SLY Herringbone, Alsace, 8 mm	7640165926574	36