

Featuring **ISOCORE Technology®** + **DROPLOCK 100** +

The pictures may differ in color from the original product.

TITAN

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

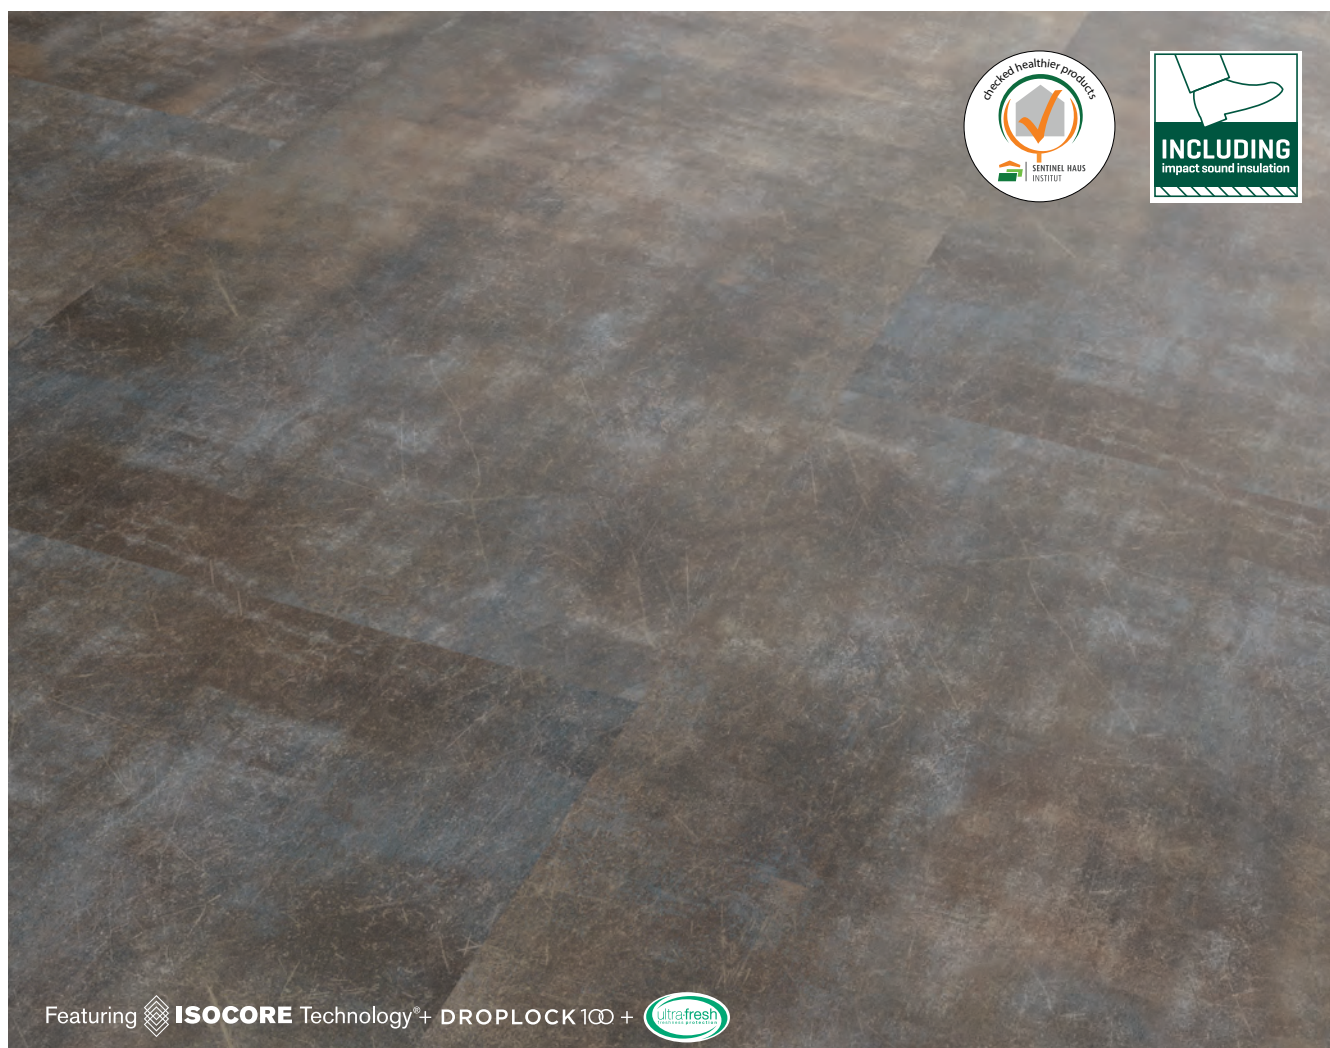

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I40213	106202702	SLY Large, Titan, 7,5 mm	7640165921883	30



Featuring  **ISOCORE Technology**® + **DROPLOCK 100** + 

The pictures may differ in color from the original product.

GOLDEN ROST

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I40211	106202704	SLY Large, Golden Rost, 7,5 mm	7640165921890	30

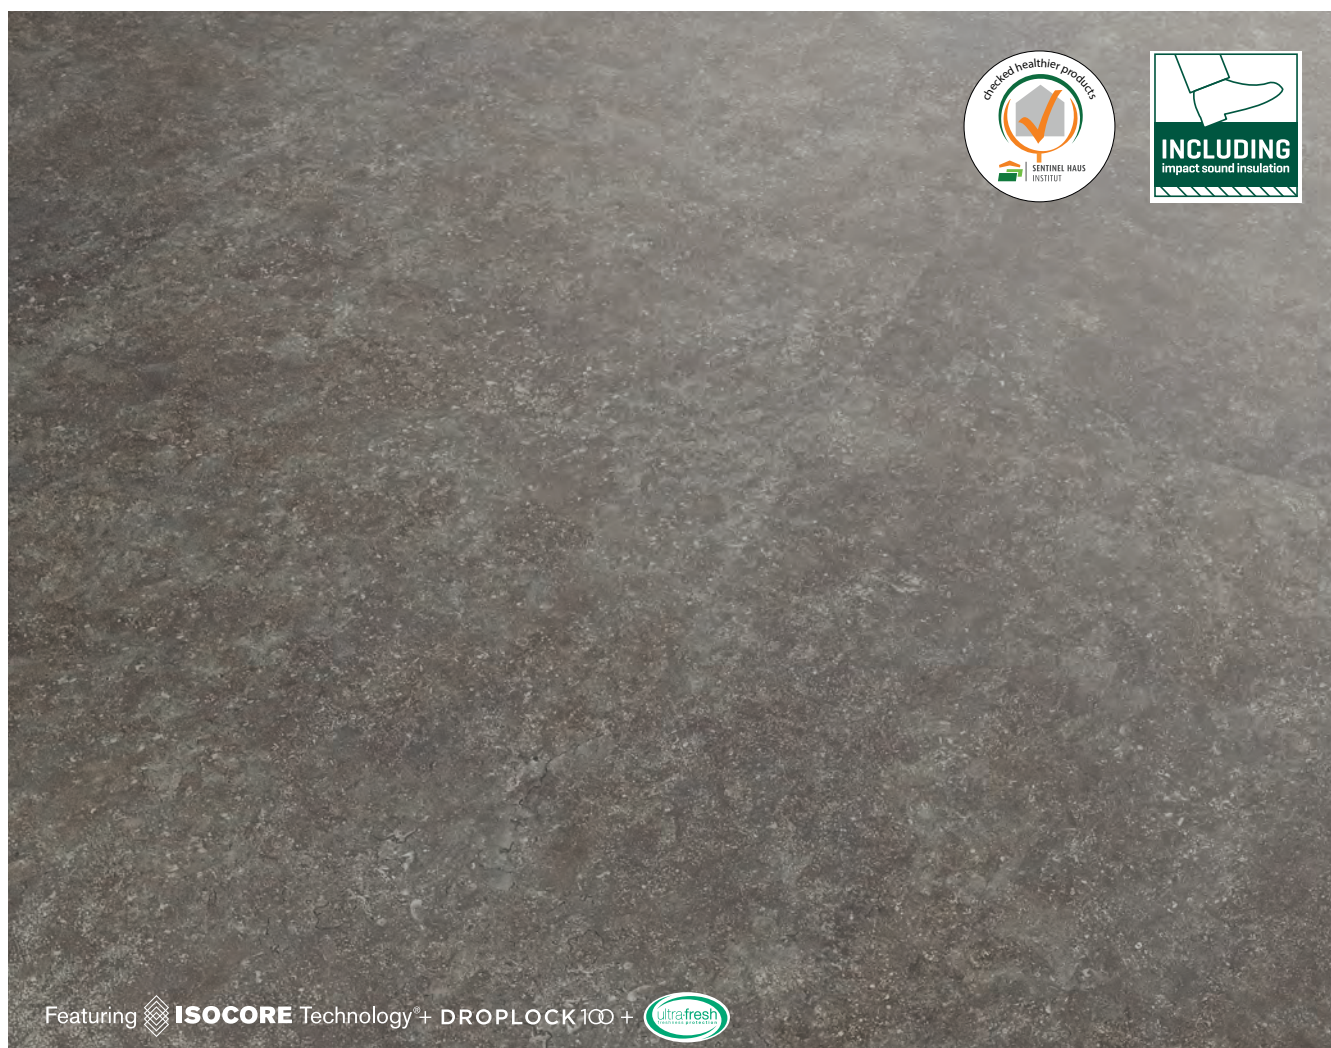

Featuring **ISOCORE** Technology[®] + **DROPLOCK 100** +

The pictures may differ in color from the original product.

LAVA


- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

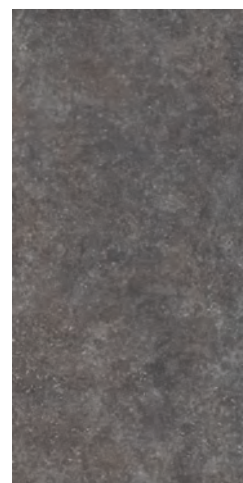

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442109	106202706	SLY Large, Lava, 7,5 mm	7640165921906	30

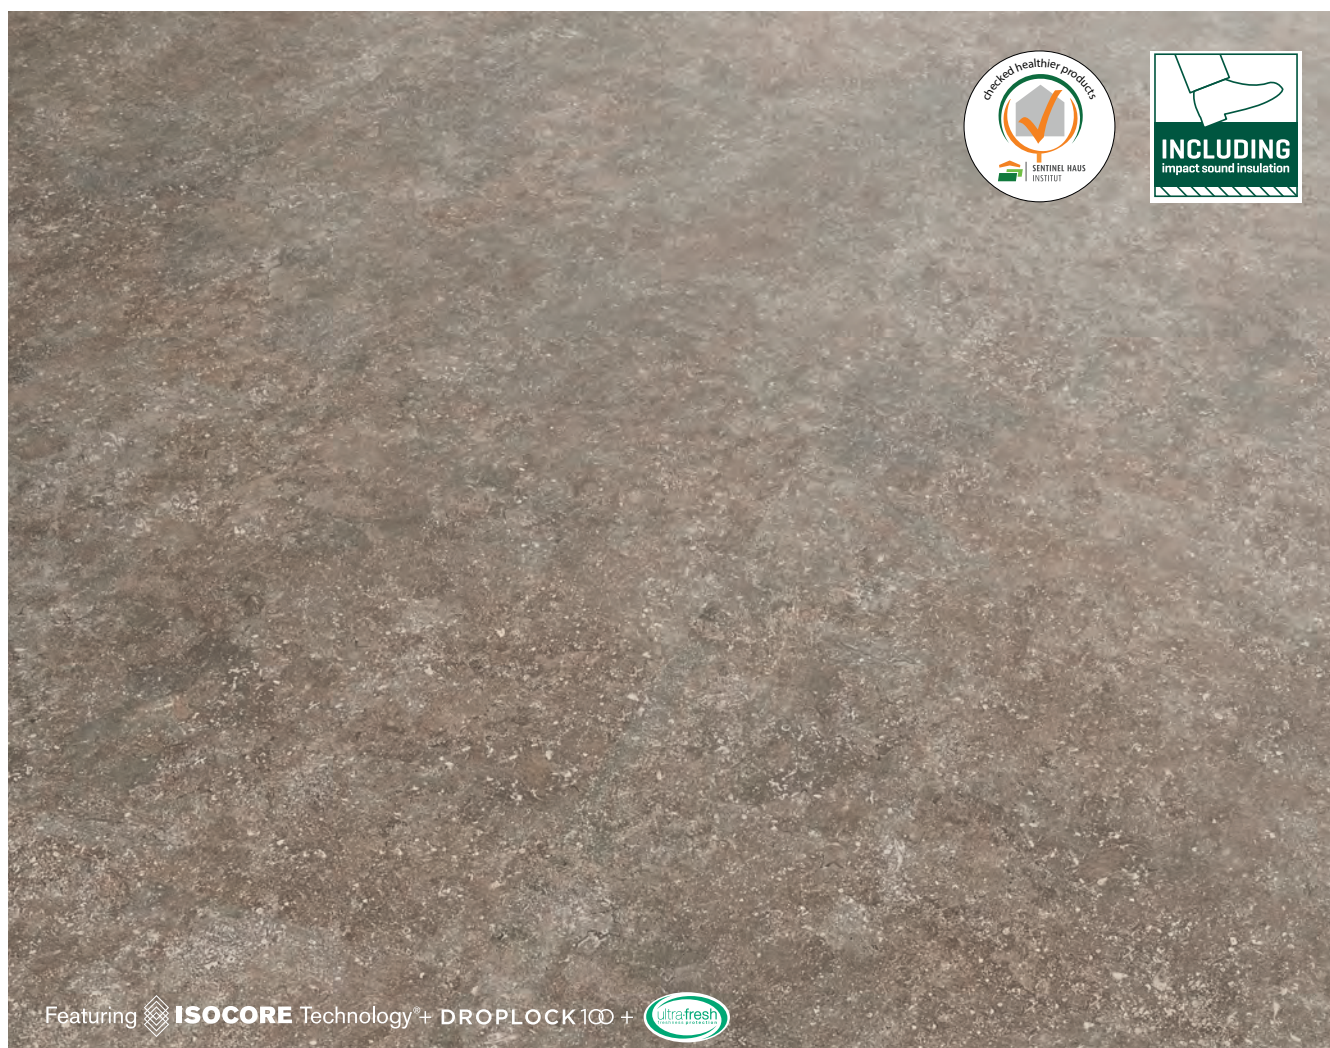

Featuring **ISOCORE** Technology* + **DROPLOCK100** +

The pictures may differ in color from the original product.

BRAVA

- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442107	106202708	SLY Large, Brava, 7,5 mm	7640165921913	30

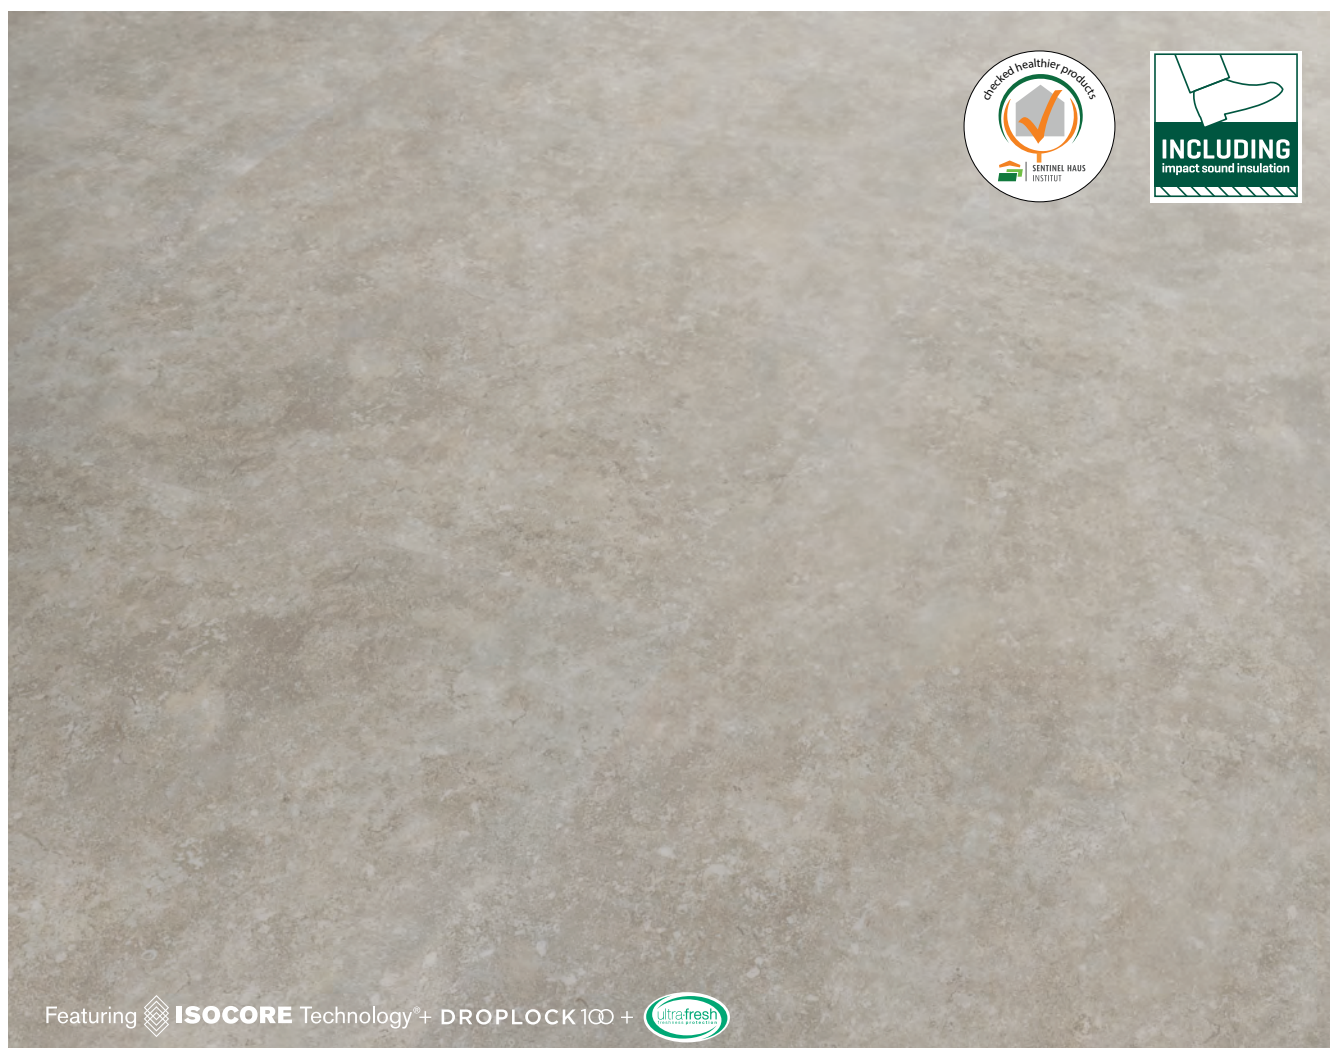

Featuring **ISOCORE** Technology® + **DROPLOCK 100** +

The pictures may differ in color from the original product.

AZURRE


- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

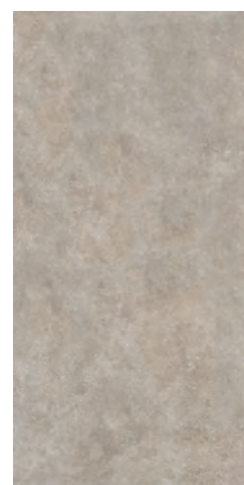

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442102	106202710	SLY Large, Azurre, 7,5 mm	7640165921968	30



Featuring **ISOCORE Technology[®]+** **DROPLOCK400** +

The pictures may differ in color from the original product.

MIDI

- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442101	106202712	SLY Large, Midi, 7,5 mm	7640165921975	30

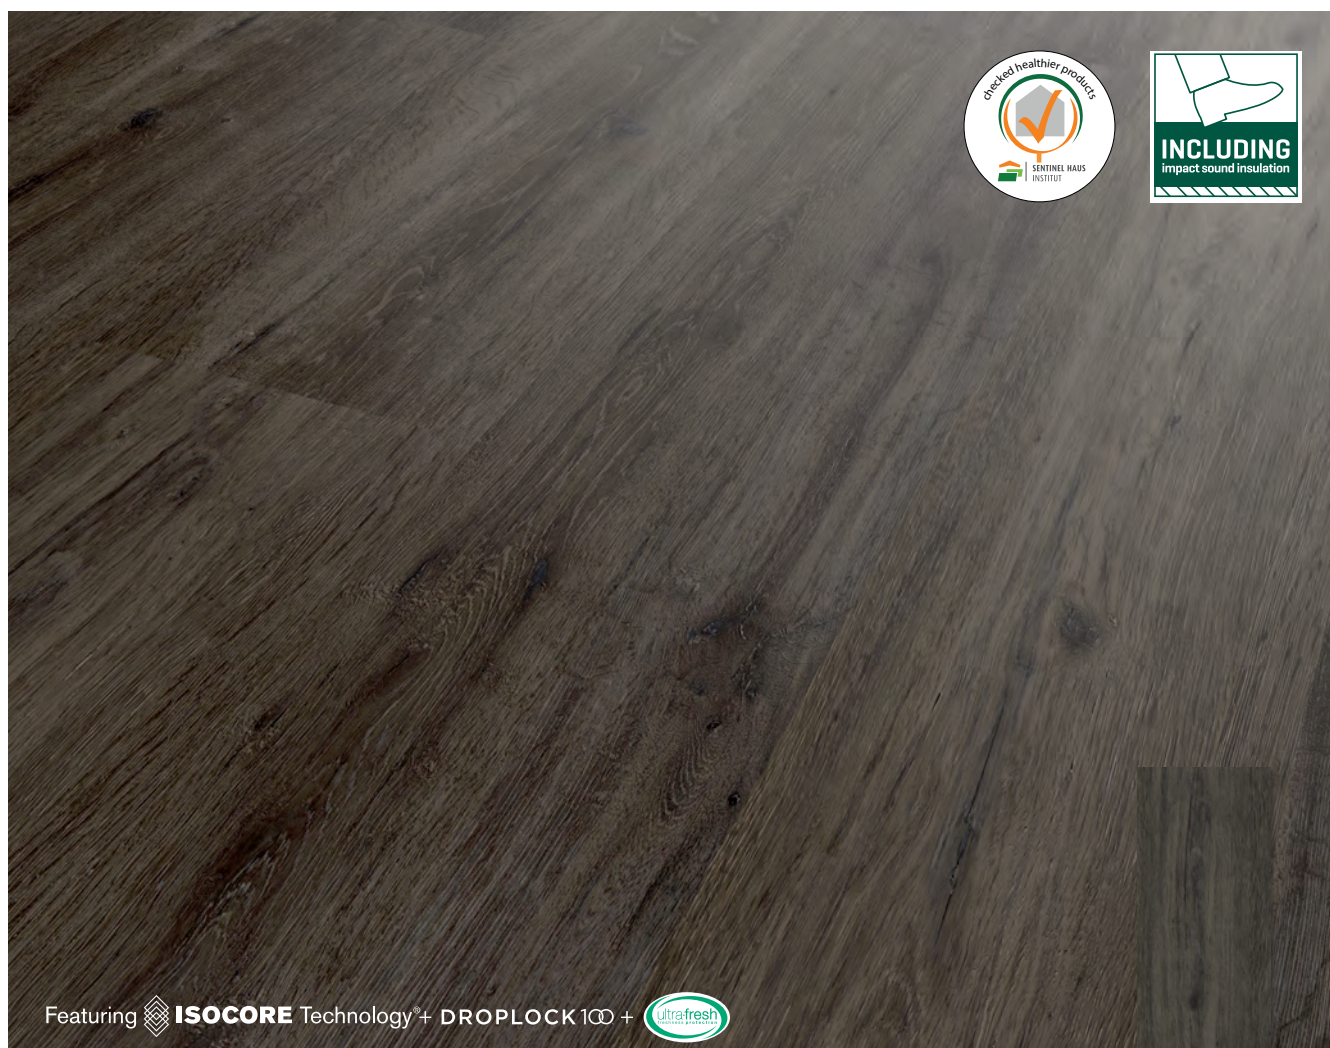

The pictures may differ in color from the original product.

GOTHAM OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107511	106202502	SLY X-Large, Gotham Oak, 7,5 mm	7640165921814	39

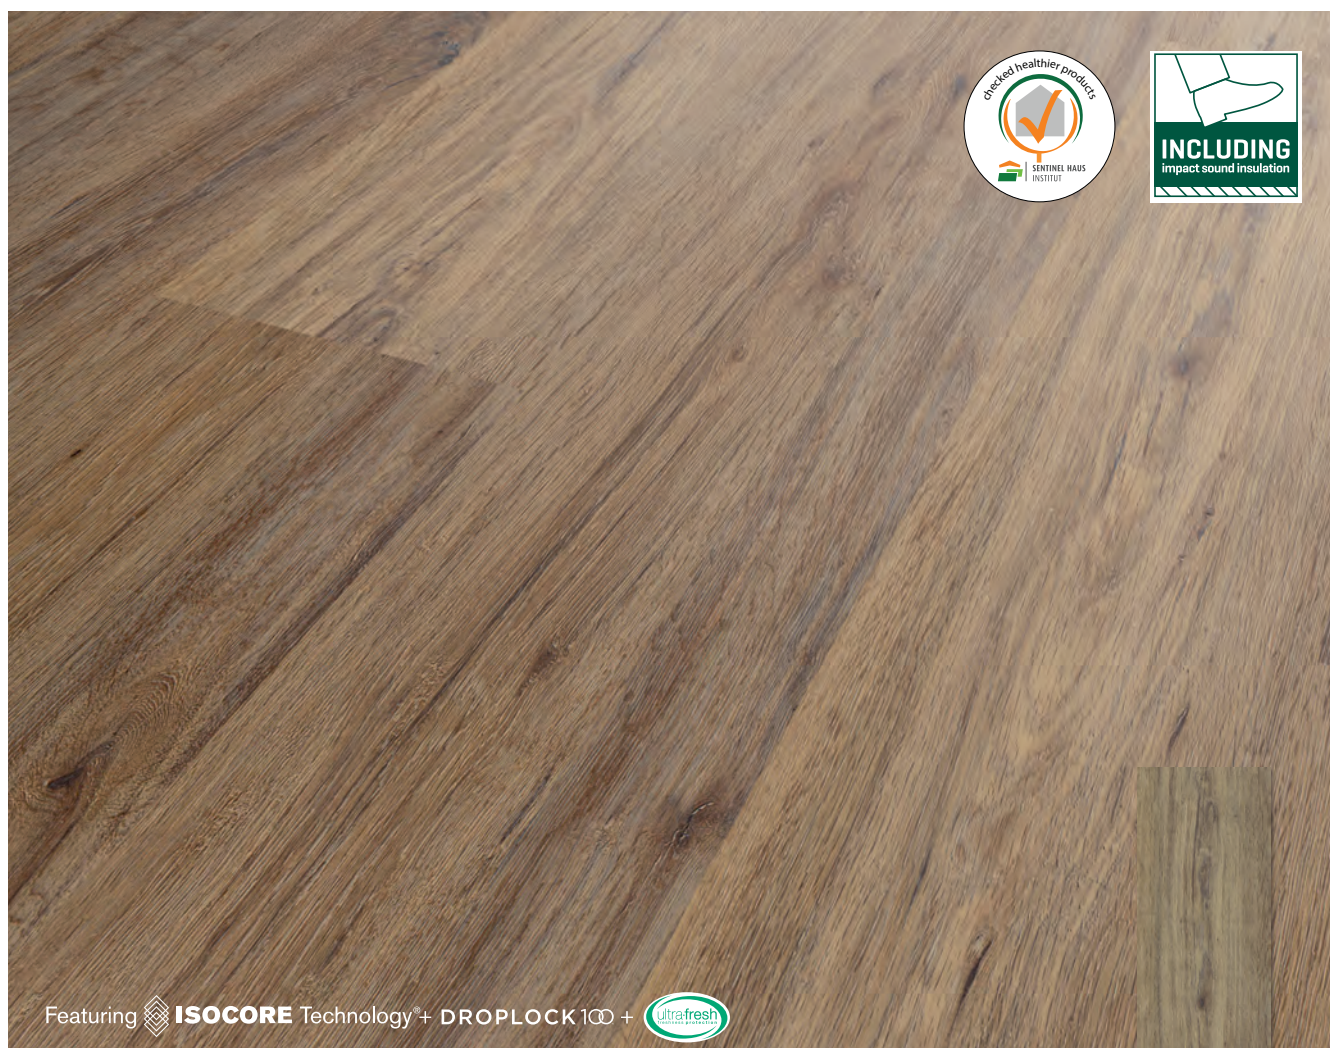

Featuring  **ISOCORE** Technology* + **DROPLOCK 100** + 

The pictures may differ in color from the original product.

EDINBURGH OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107515	106202504	SLY X-Large, Edinburgh Oak, 7,5 mm	7640165921869	39

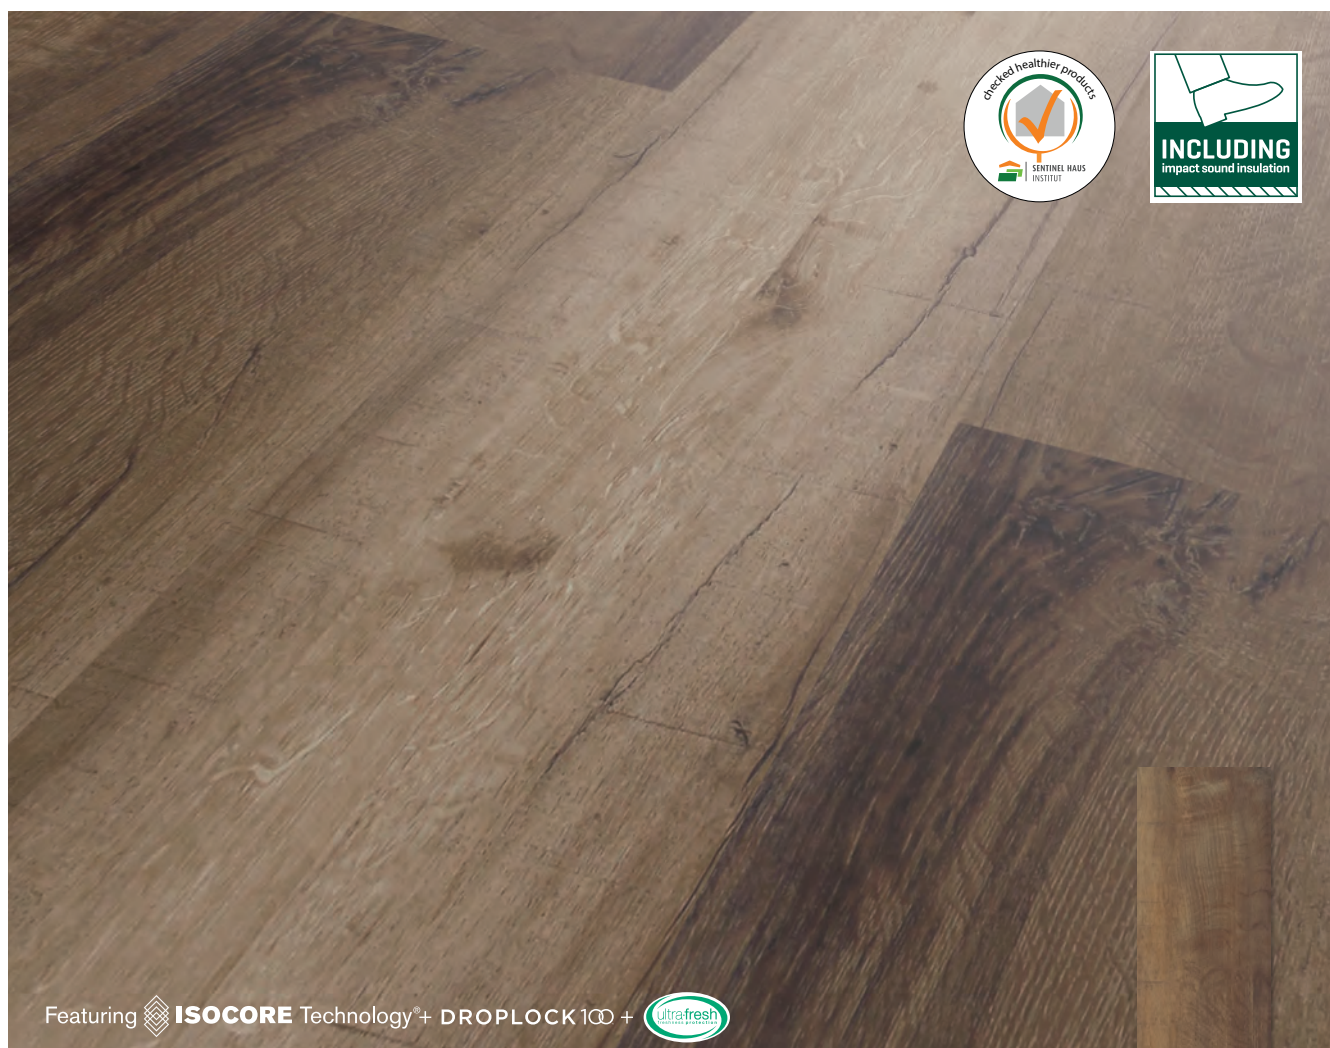

Featuring **ISOCORE** Technology® + **DROPLOCK 100** +

The pictures may differ in color from the original product.

BUCKINGHAM OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

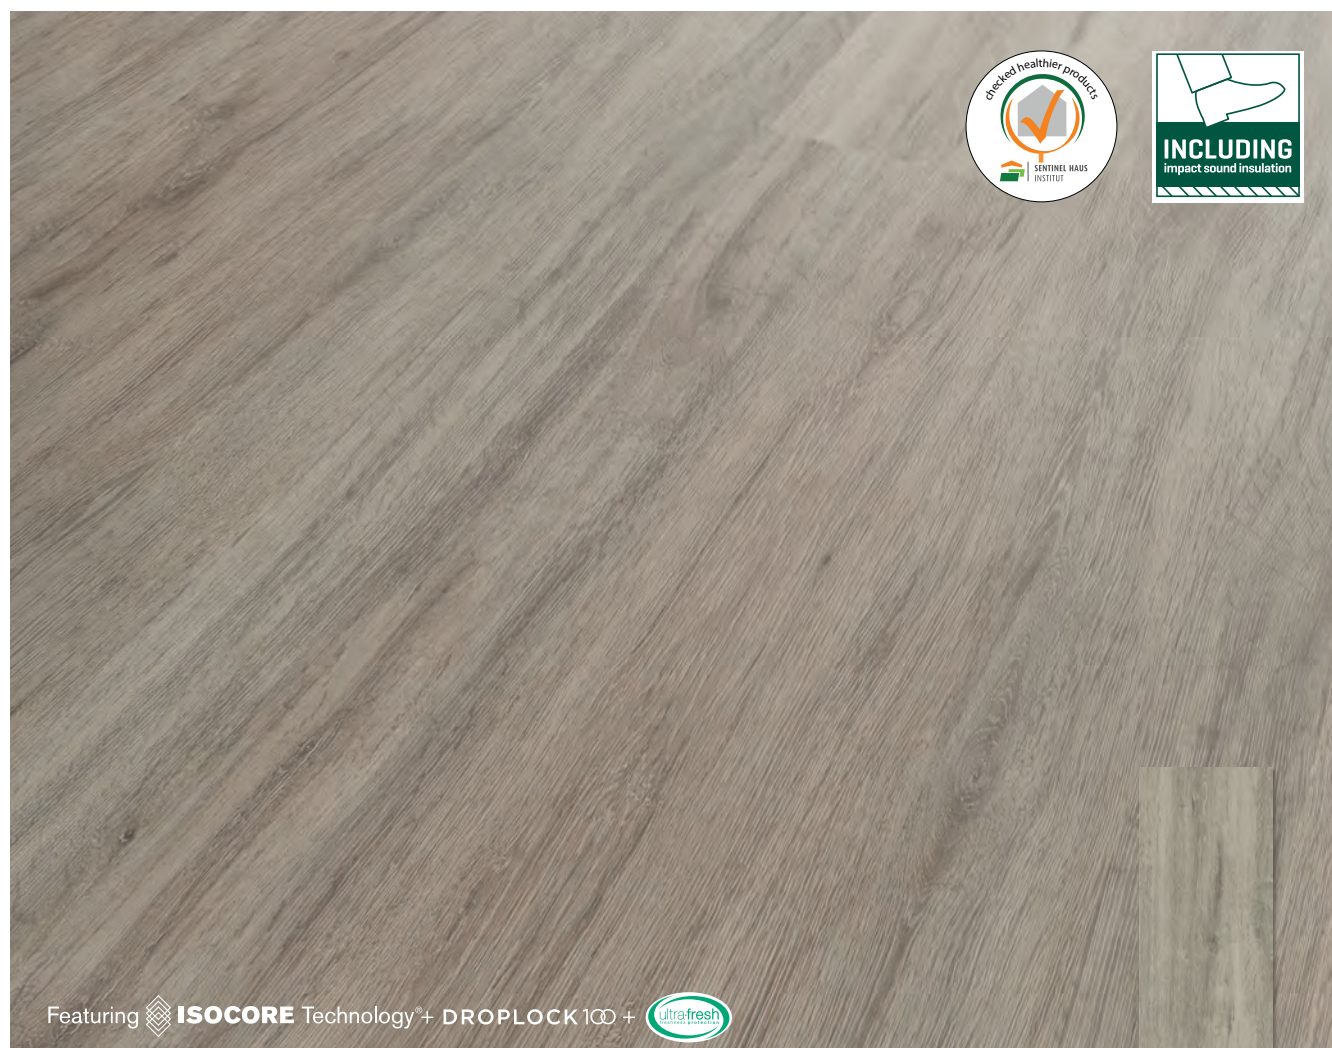

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-2	106202506	SLY X-Large, Buckingham Oak, 7,5 mm	7640165921852	39



Featuring  **ISOCORE** Technology®+ **DROPLOCK 100** + 

The pictures may differ in color from the original product.

ABERDEEN OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107502	106202508	SLY X-Large, Aberdeen Oak, 7,5 mm	7640165921838	39

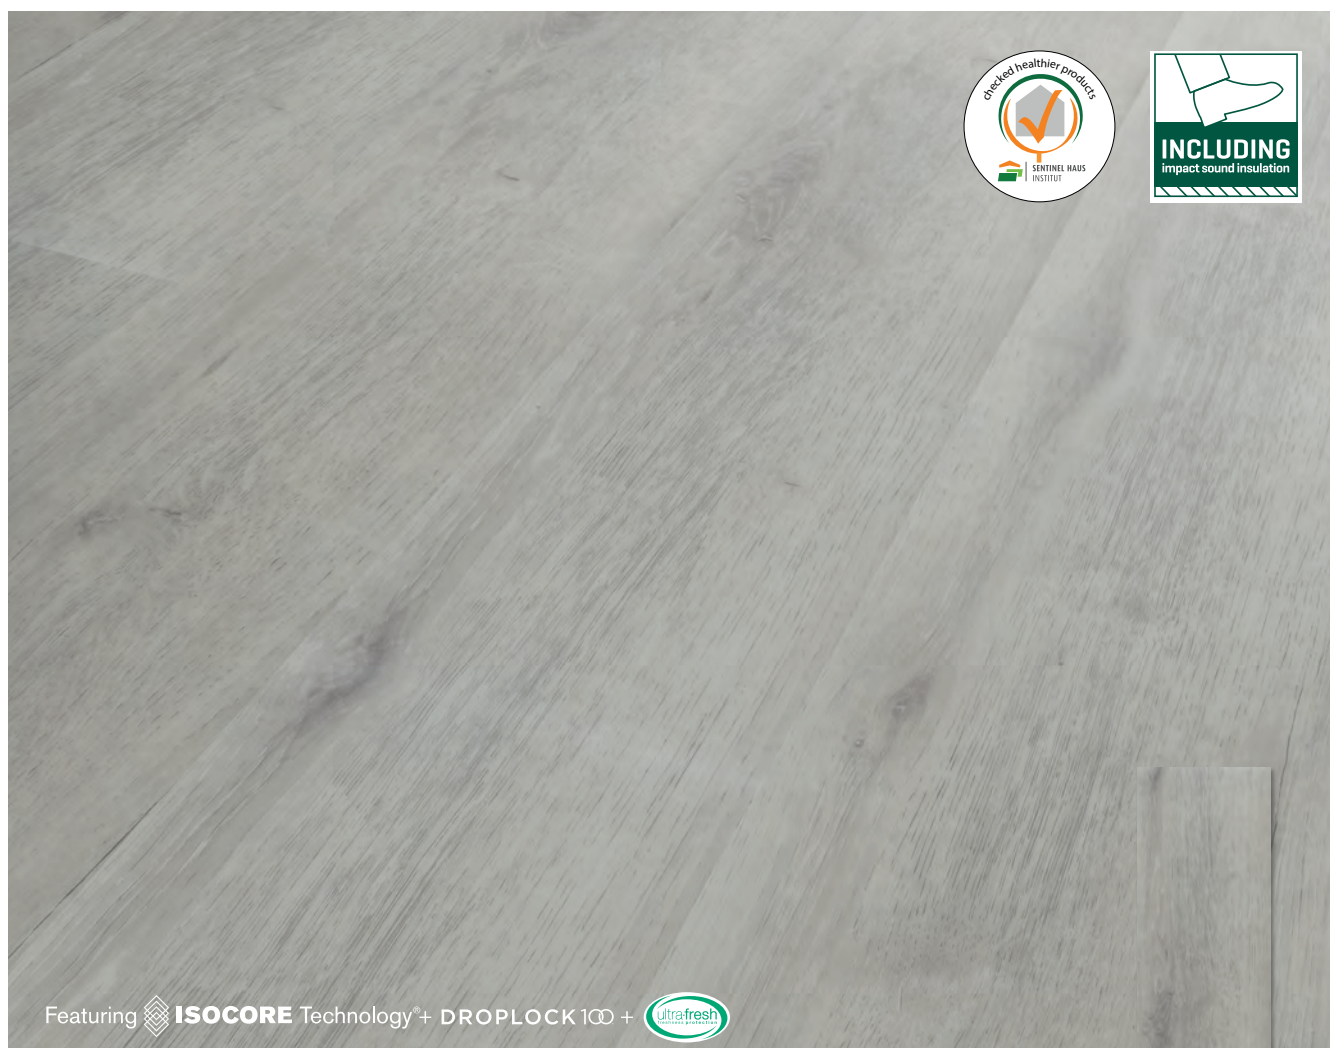

Featuring **ISOCORE** Technology[®] + **DROPLOCK 100** +

The pictures may differ in color from the original product.

CHELSEA OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275115	106202510	SLY X-Large, Chelsea Oak, 7,5 mm	7640165921821	39



Featuring  **ISOCORE** Technology+ **DROPLOCK 100** + 

The pictures may differ in color from the original product.

BRISTOL OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
1032910	106202512	SLY X-Large, Bristol Oak, 7,5 mm	7640165921807	39

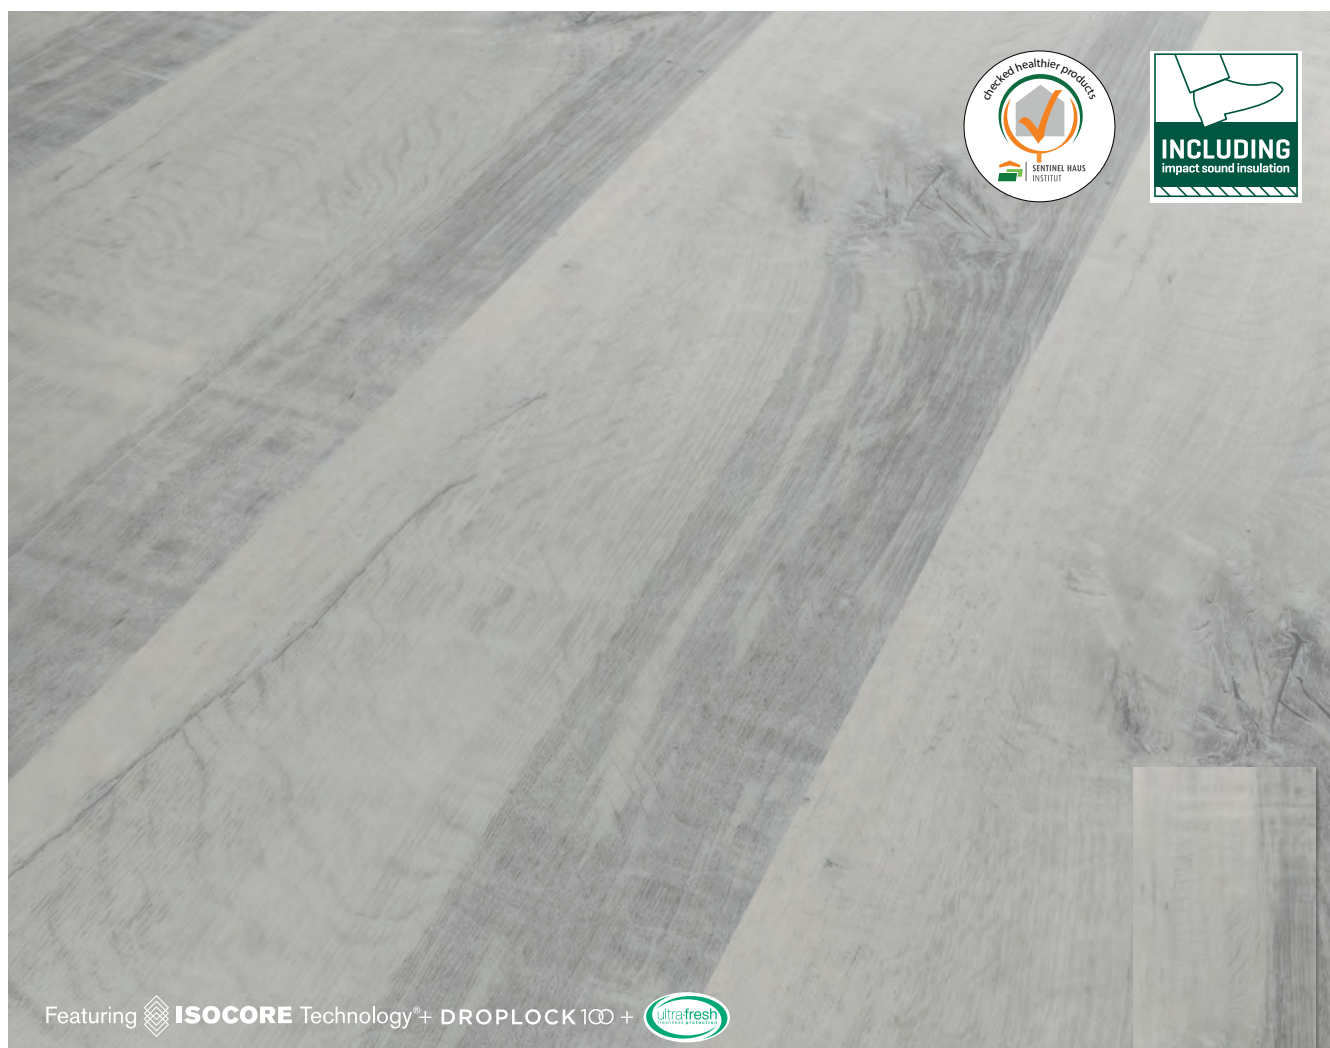

Featuring **ISOCORE Technology®** + **DROPLOCK 100** +

The pictures may differ in color from the original product.

DUBLIN OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-8	106202602	SLY XX-Large, Dublin Oak, 7 mm	7640165921876	36

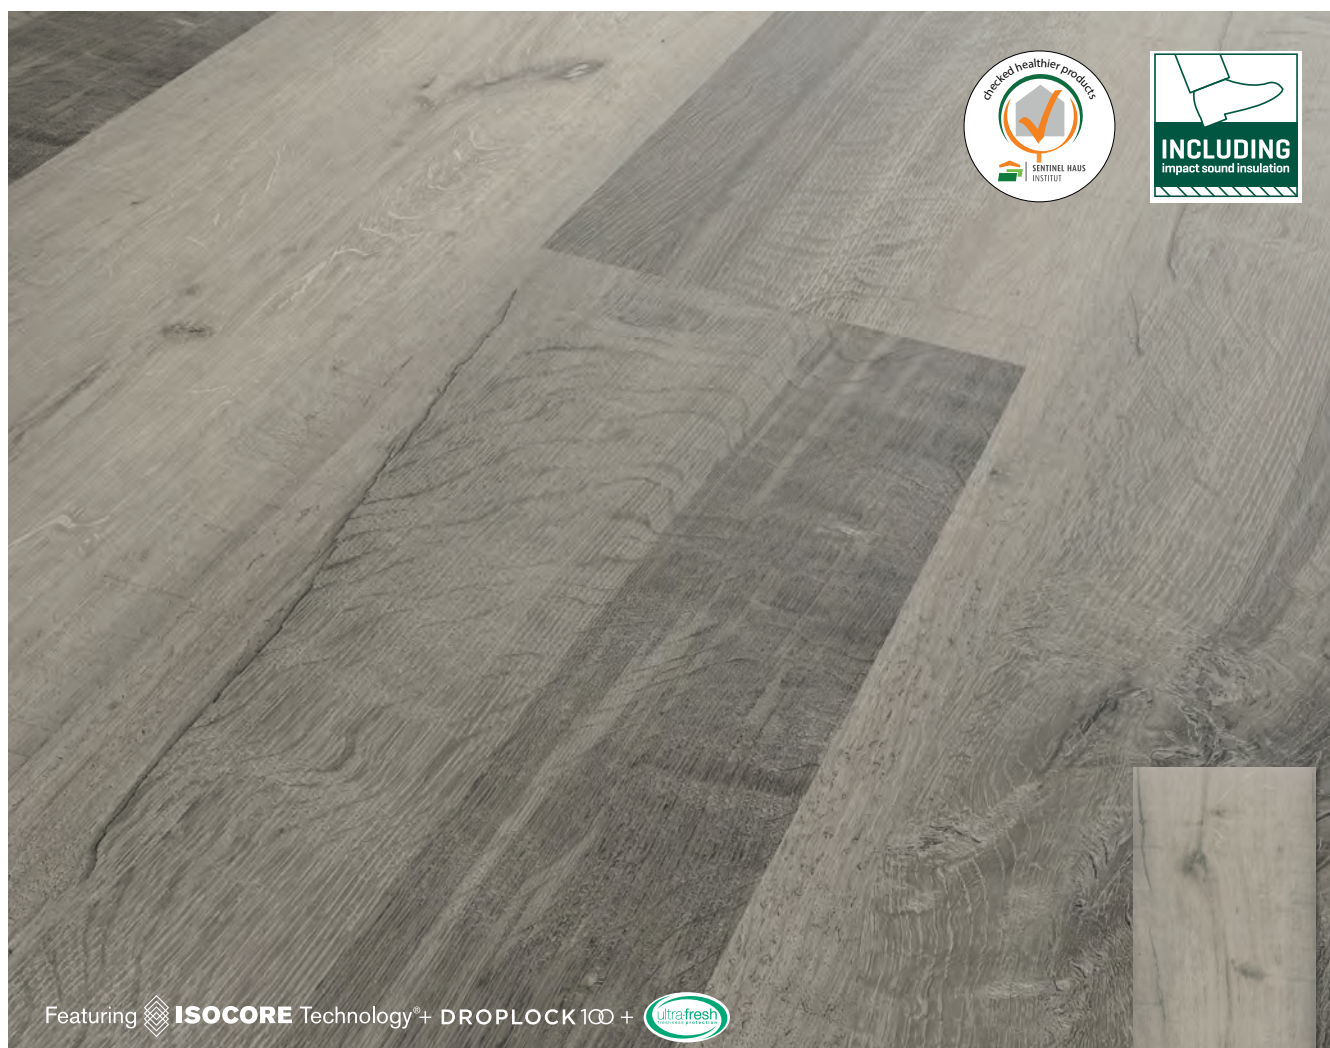

The pictures may differ in color from the original product.

COTTON OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-11	106202604	SLY XX-Large, Cotton Oak, 7 mm	7640165921845	36

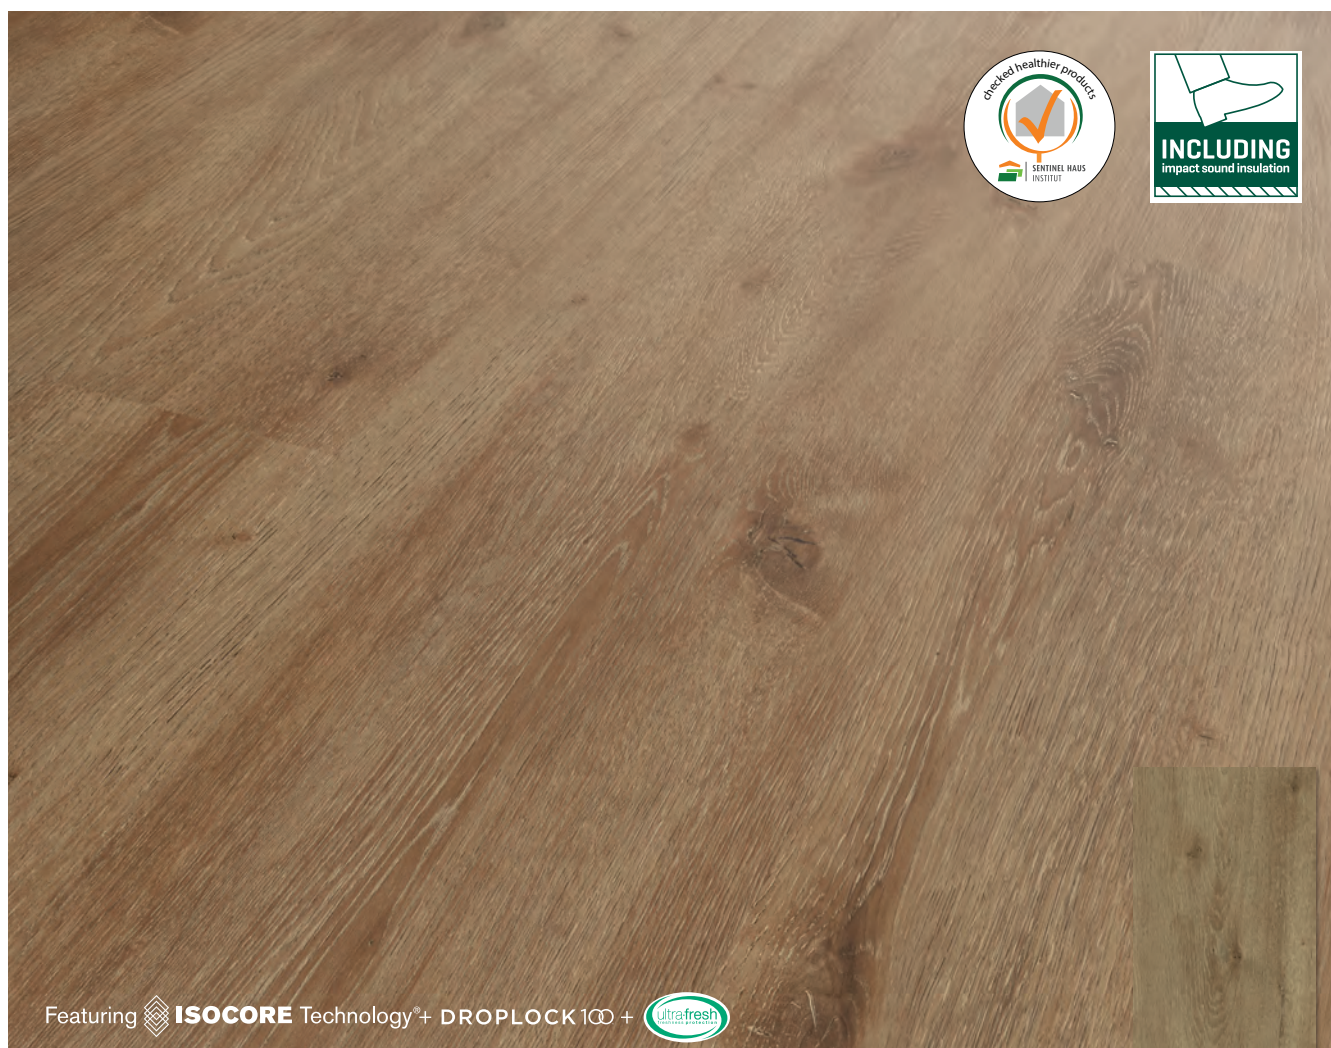

The pictures may differ in color from the original product.

CANSIGTON OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275114	106202606	SLY XX-Large, Cansigton Oak, 7 mm	7640165922118	36

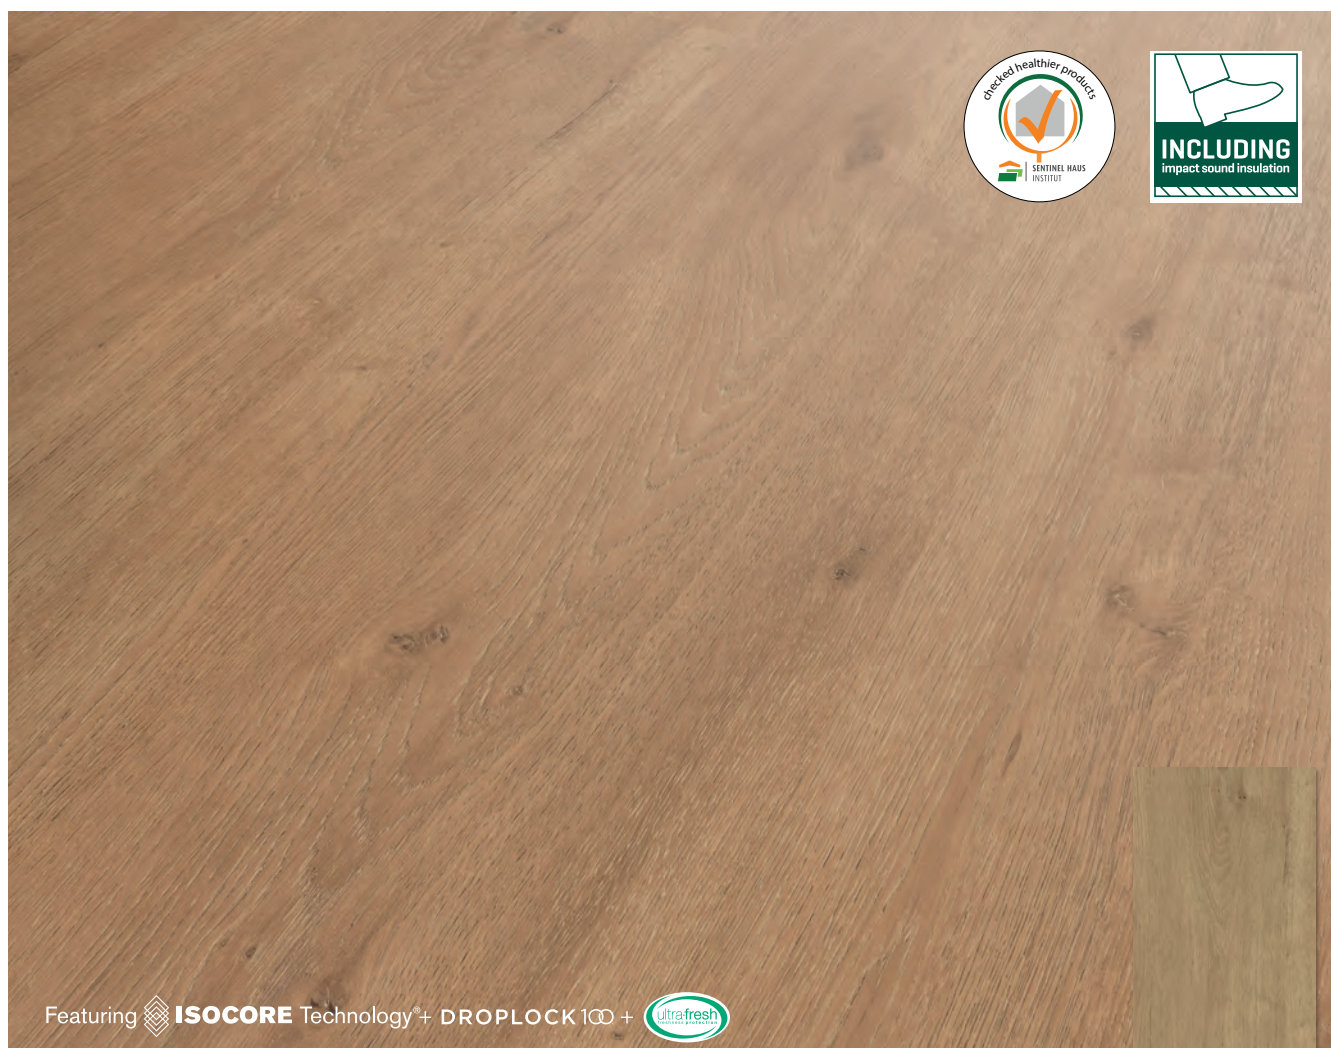

Featuring **ISOCORE** Technology[®] + **DROPLOCK 100** +

The pictures may differ in color from the original product.

NOTTING HILL OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:



- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

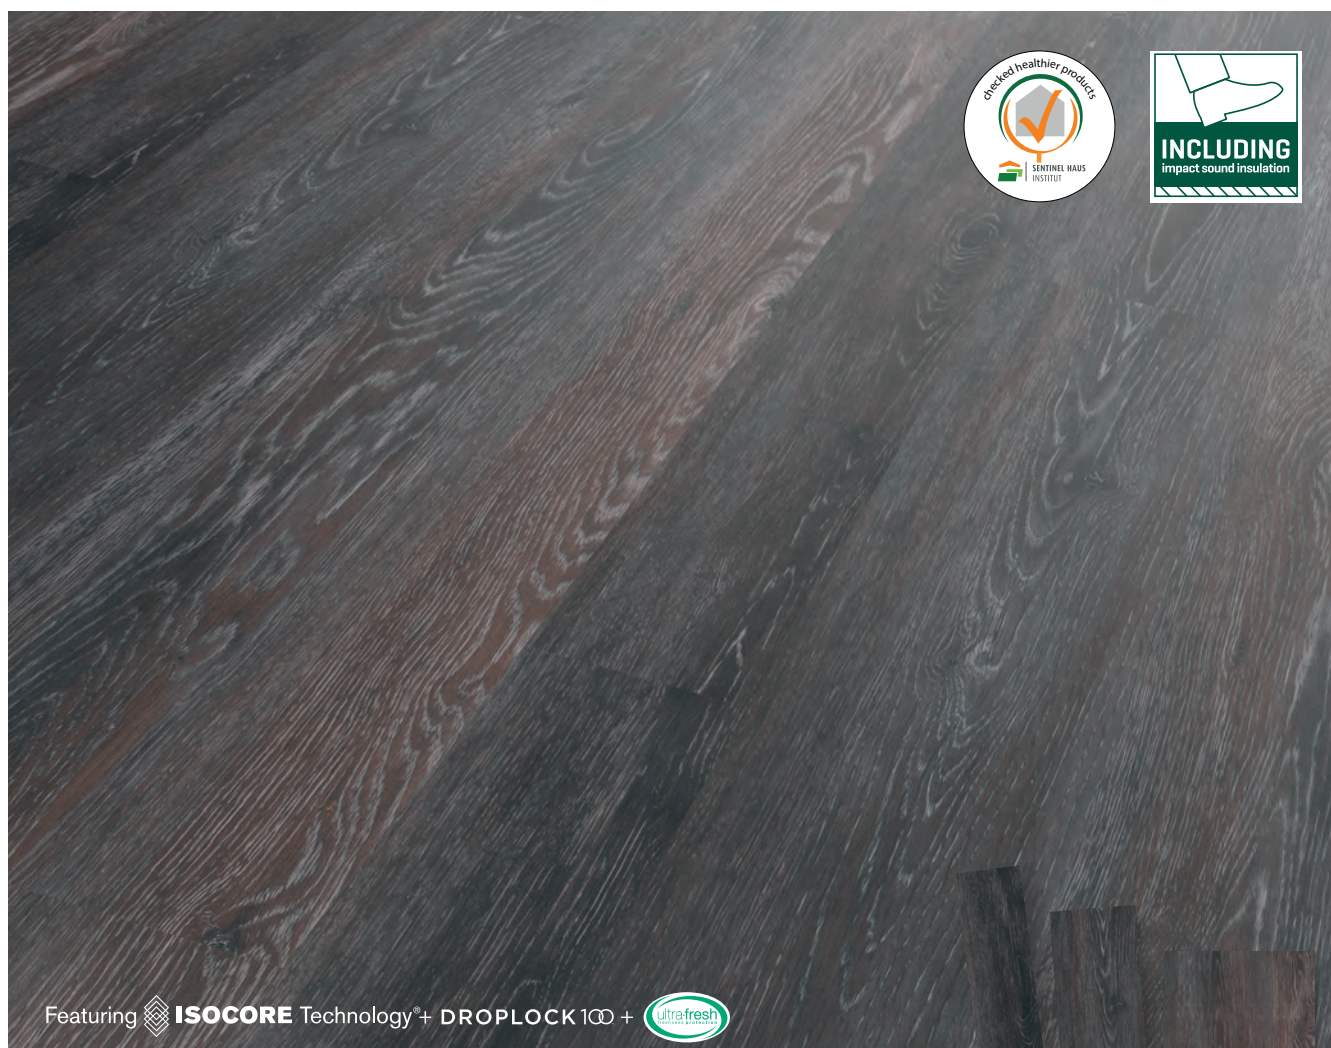Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275117	106202608	SLY XX-Large, Notting Hill Oak, 7 mm	7640165922125	36



Featuring  **ISOCORE** Technology® + **DROPLOCK 100** + 

The pictures may differ in color
from the original product.

CAMBRIDGE OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I953113	106202802	SLY 1:2:3, Cambridge Oak, 7,5 mm	7640165921920	48

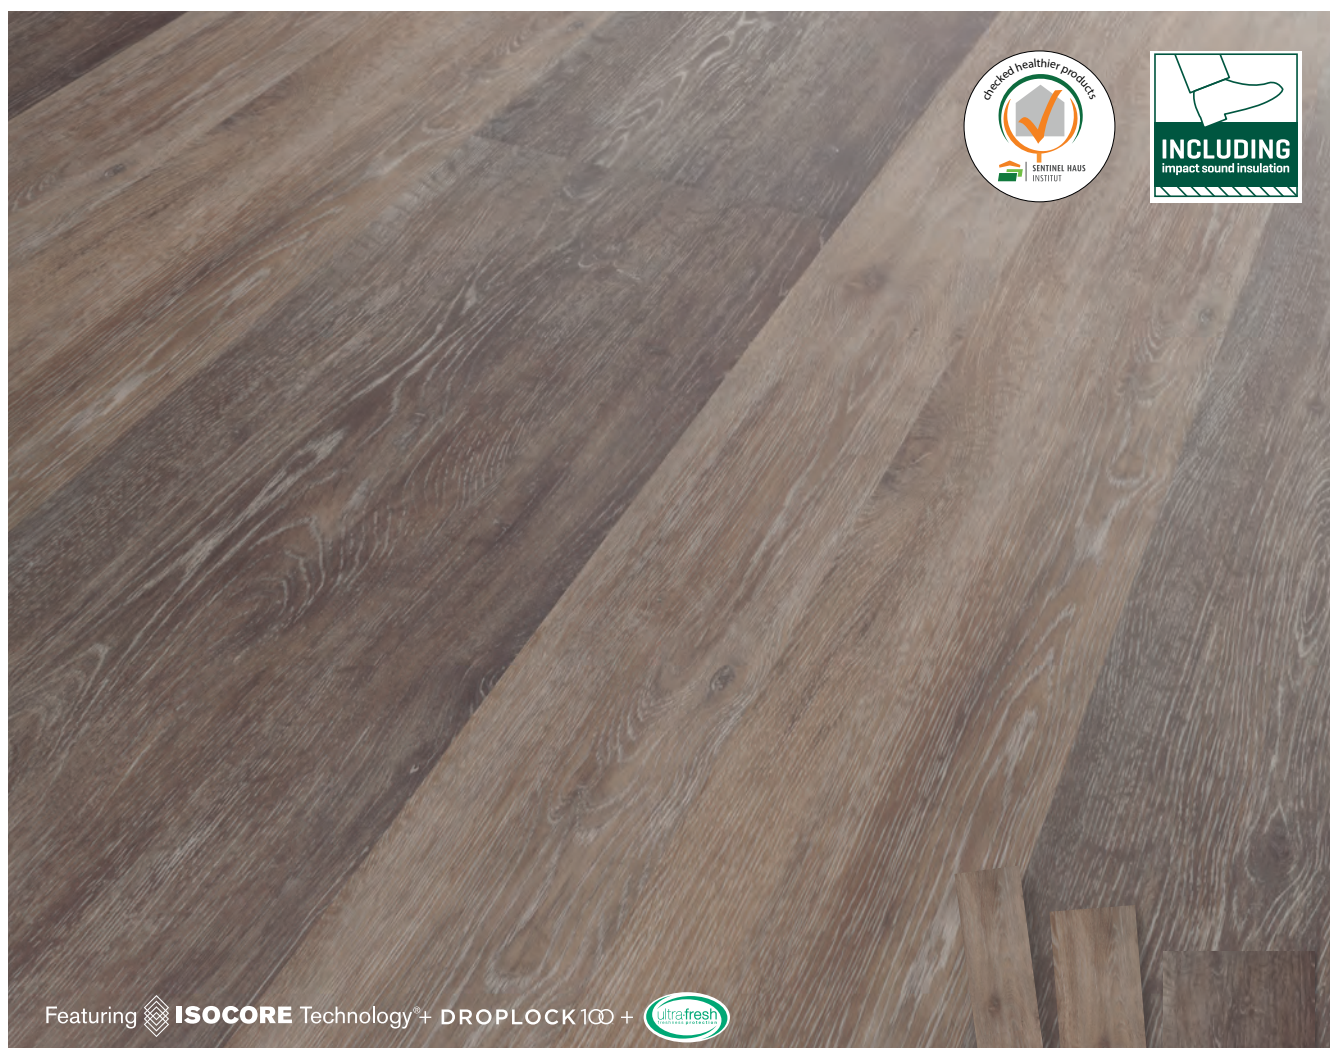

Featuring  **ISOCORE** Technology*+ **DROPLOCK 100** + 

The pictures may differ in color
from the original product.

OXFORD OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I95317	106202804	SLY 1:2:3, Oxford Oak, 7,5 mm	7640165921944	48

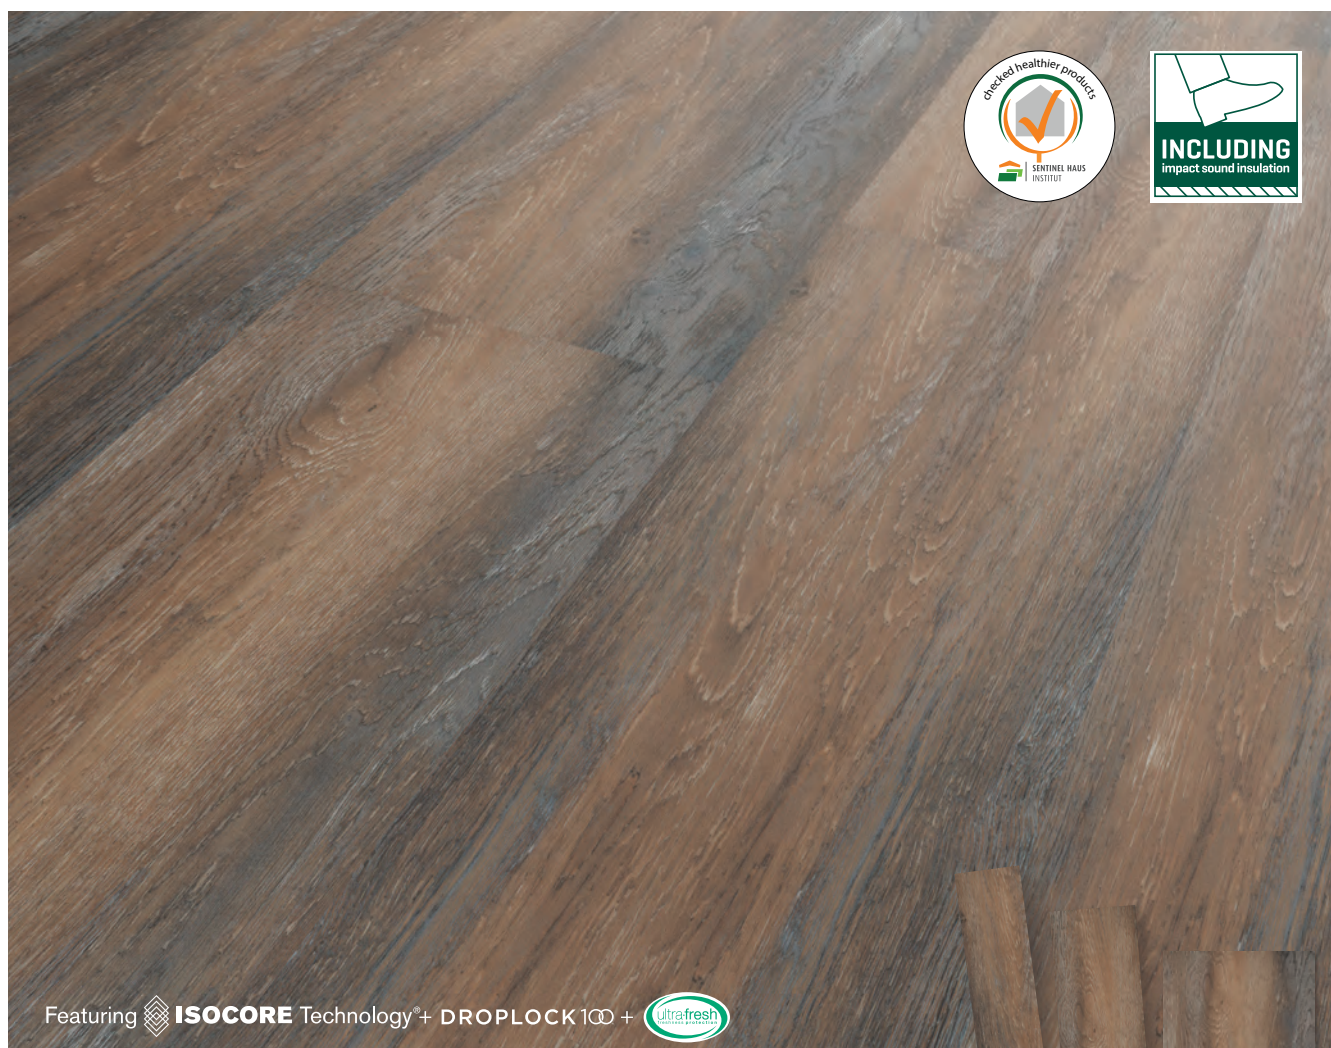

The pictures may differ in color
from the original product.

HARVARD OAK

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I128213	106202806	SLY 1:2:3, Harvard Oak, 7,5 mm	7640165921951	48

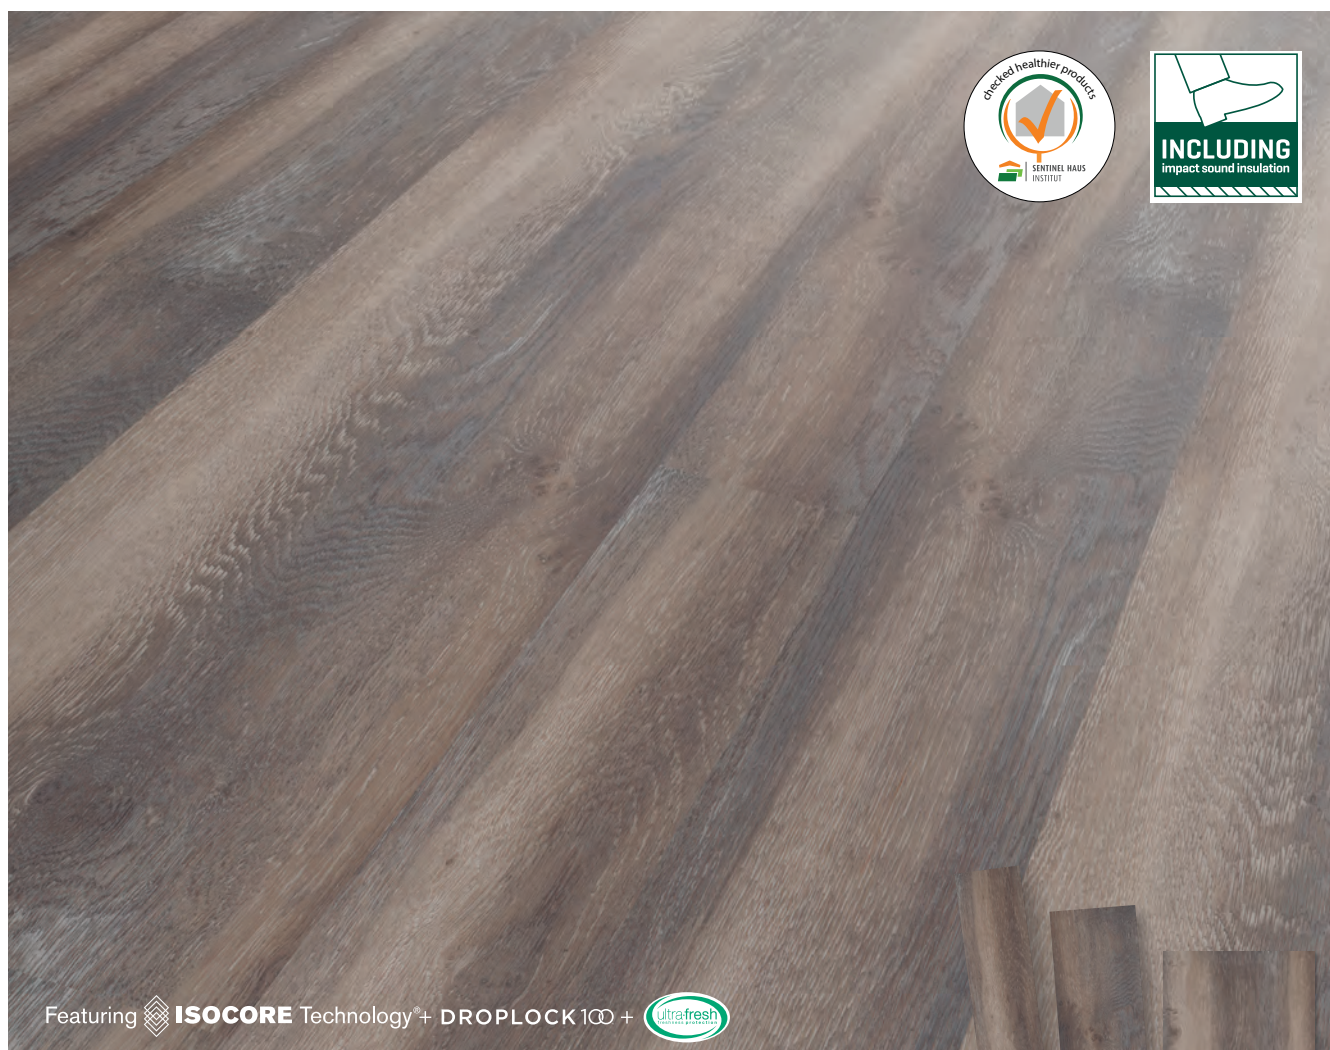

The pictures may differ in color
from the original product.

YALE OAK

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1210 x W 108 / 142 / 250 mm
- ◇ Carton content 3 x 3 planks = 1,815 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:



- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

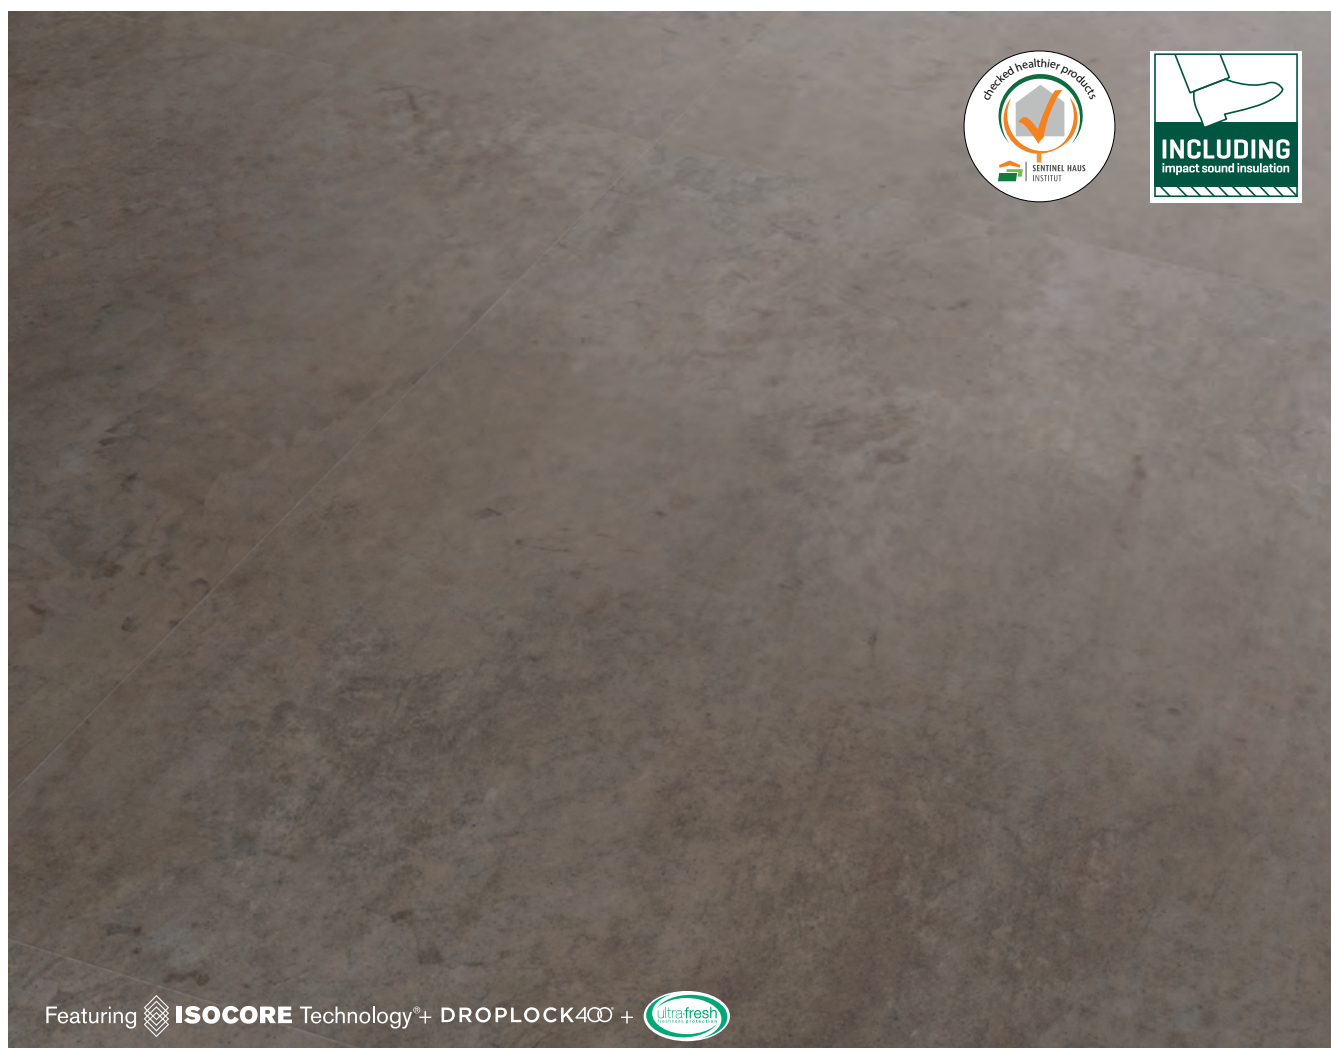Decor No.	Facido No.	Description	EAN	Pack/Pallet
I128211	106202808	SLY 1:2:3, Yale Oak, 7,5 mm	7640165921937	48



Featuring  **ISOCORE Technology**® + **DROPLOCK400** + 

The pictures may differ in color from the original product.

UMBRIA


- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 600 x W 600 mm
- ◇ Carton content 6 tiles = 2,160 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I0123817	106202911	SLY Square, Umbria, 8 mm	7640165926482	34



Featuring **ISOCORE** Technology®+ **DROPLOCK400** +

The pictures may differ in color from the original product.

SARDEGNA

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 600 x W 600 mm
- ◇ Carton content 6 tiles = 2,160 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I0123819	106202913	SLY Square, Sardegna, 8 mm	7640165926499	34



Featuring  **ISOCORE** Technology® + **DROPLOCK400** + 

The pictures may differ in color from the original product.

LOMBARDIA

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 600 x W 600 mm
- ◇ Carton content 6 tiles = 2,160 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I0123820	106202915	SLY Square, Lombardia, 8 mm	7640165926505	34

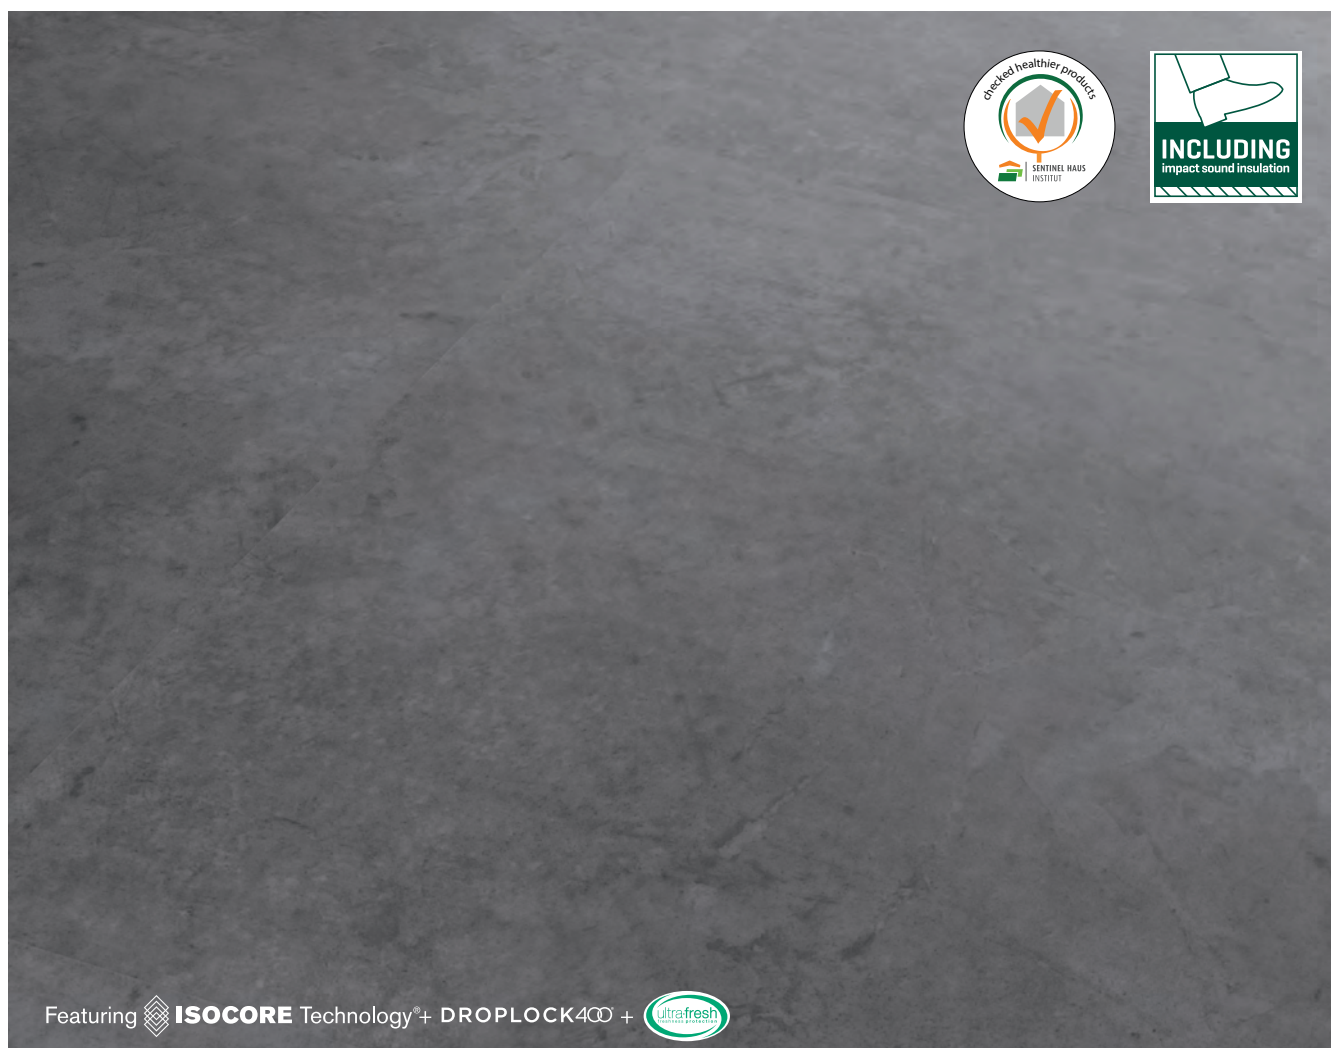

Featuring **ISOCORE Technology**®+ **DROPLOCK400** +

The pictures may differ in color from the original product.

CALABRIA

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 600 x W 600 mm
- ◇ Carton content 6 tiles = 2,160 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I0123816	106202917	SLY Square, Calabria, 8 mm	7640165926512	34

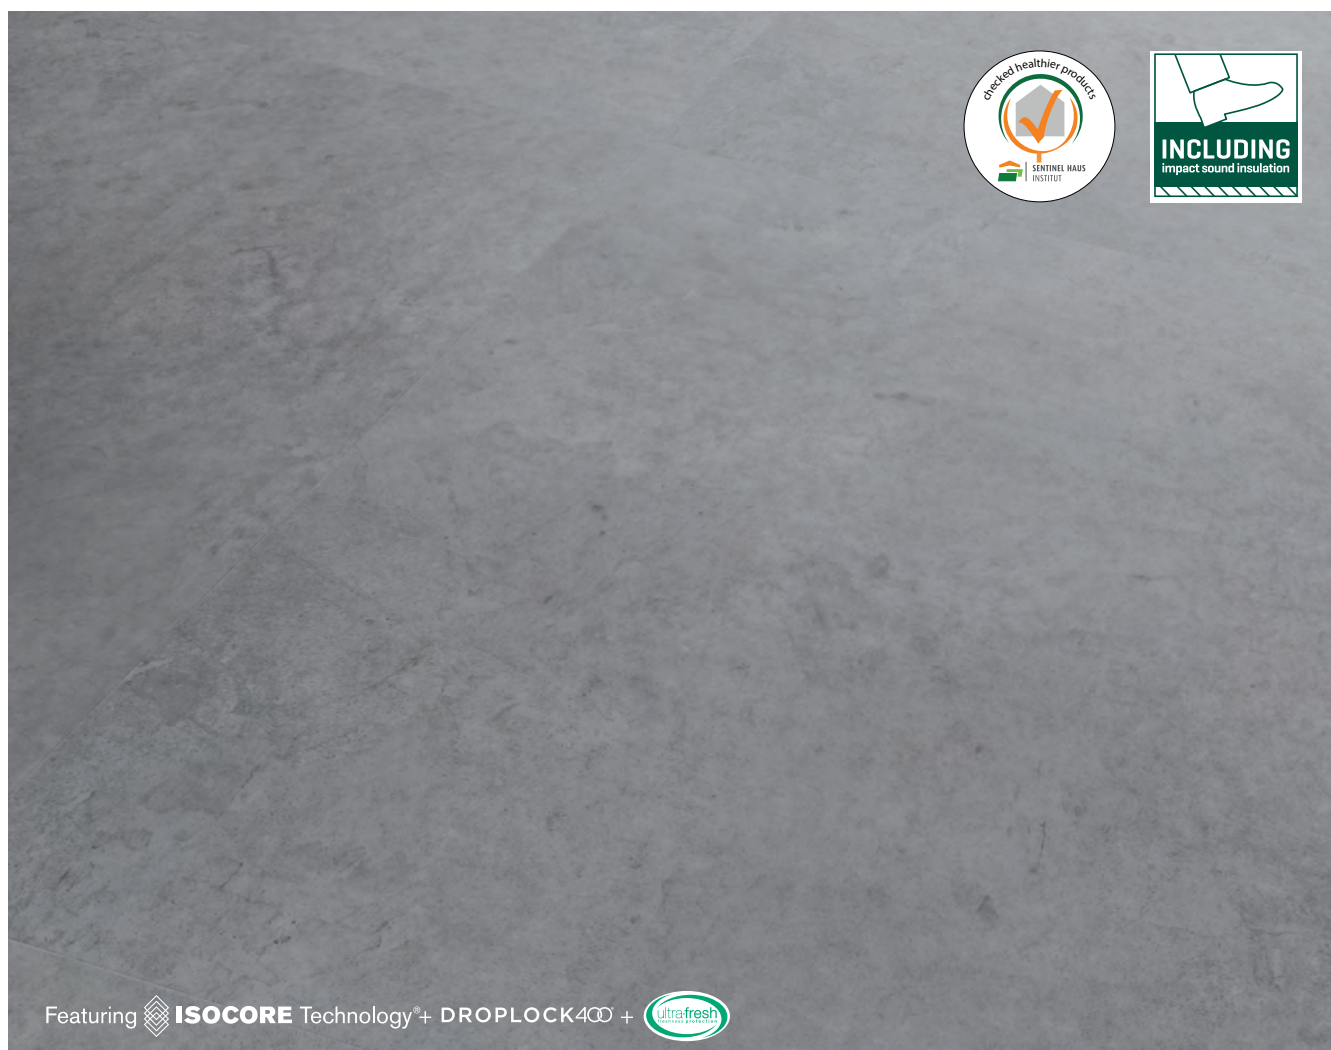

Featuring **ISOCORE** Technology®+ **DROPLOCK400** +

The pictures may differ in color from the original product.

ABRUZZO

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 600 x W 600 mm
- ◇ Carton content 6 tiles = 2,160 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I0123814	106202919	SLY Square, Abruzzo, 8 mm	7640165926529	34

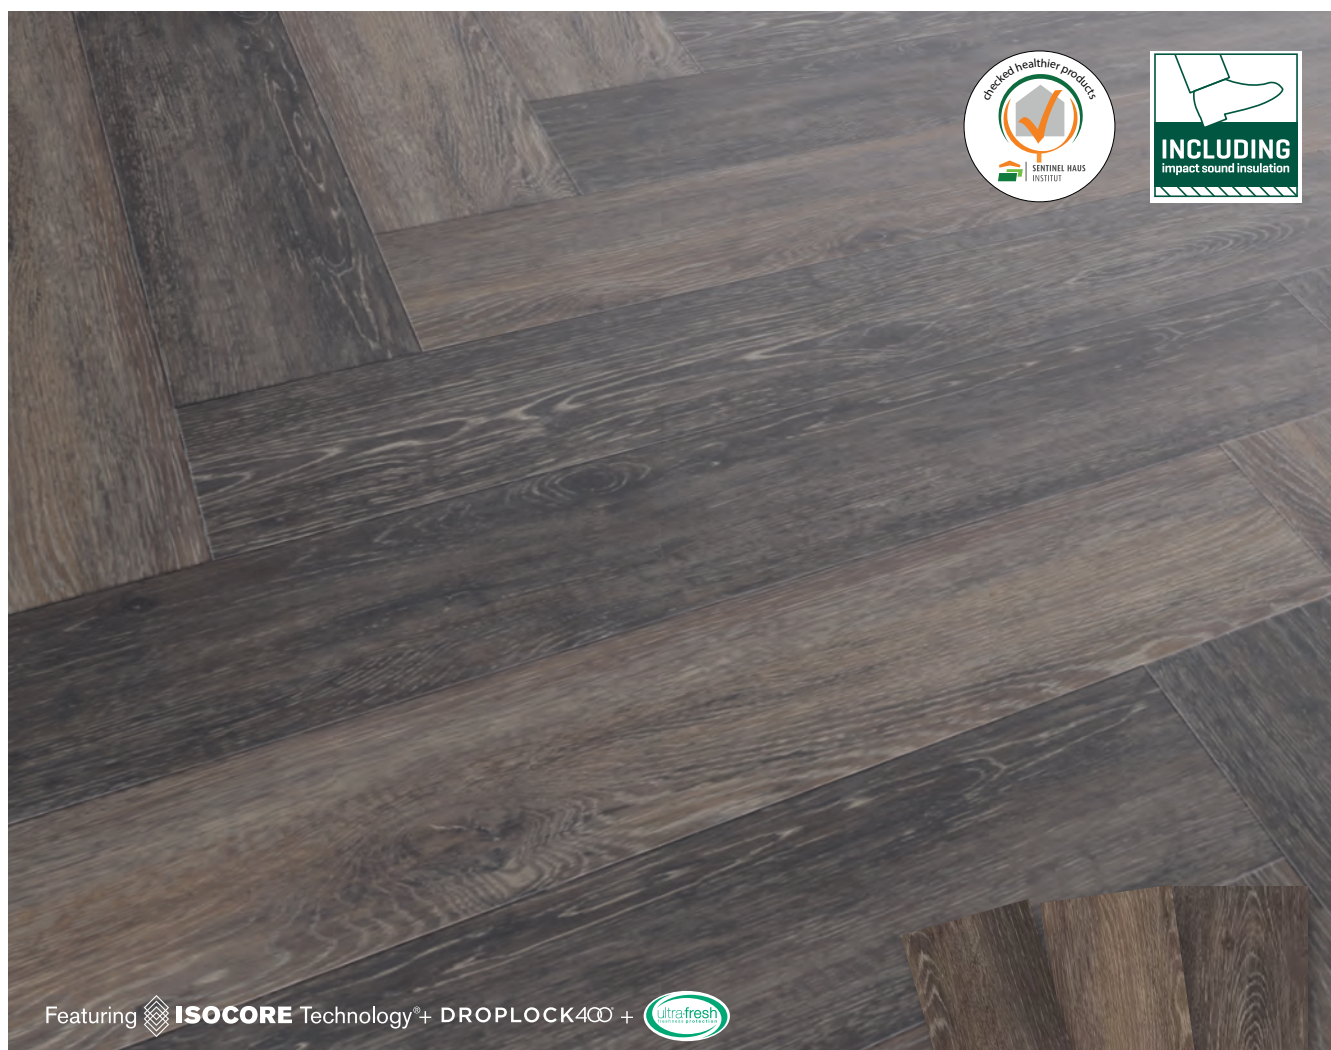

The pictures may differ in color
from the original product.

LORRAINE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB953112	106202961	SLY Herringbone, Lorraine, 8 mm	7640165926536	36

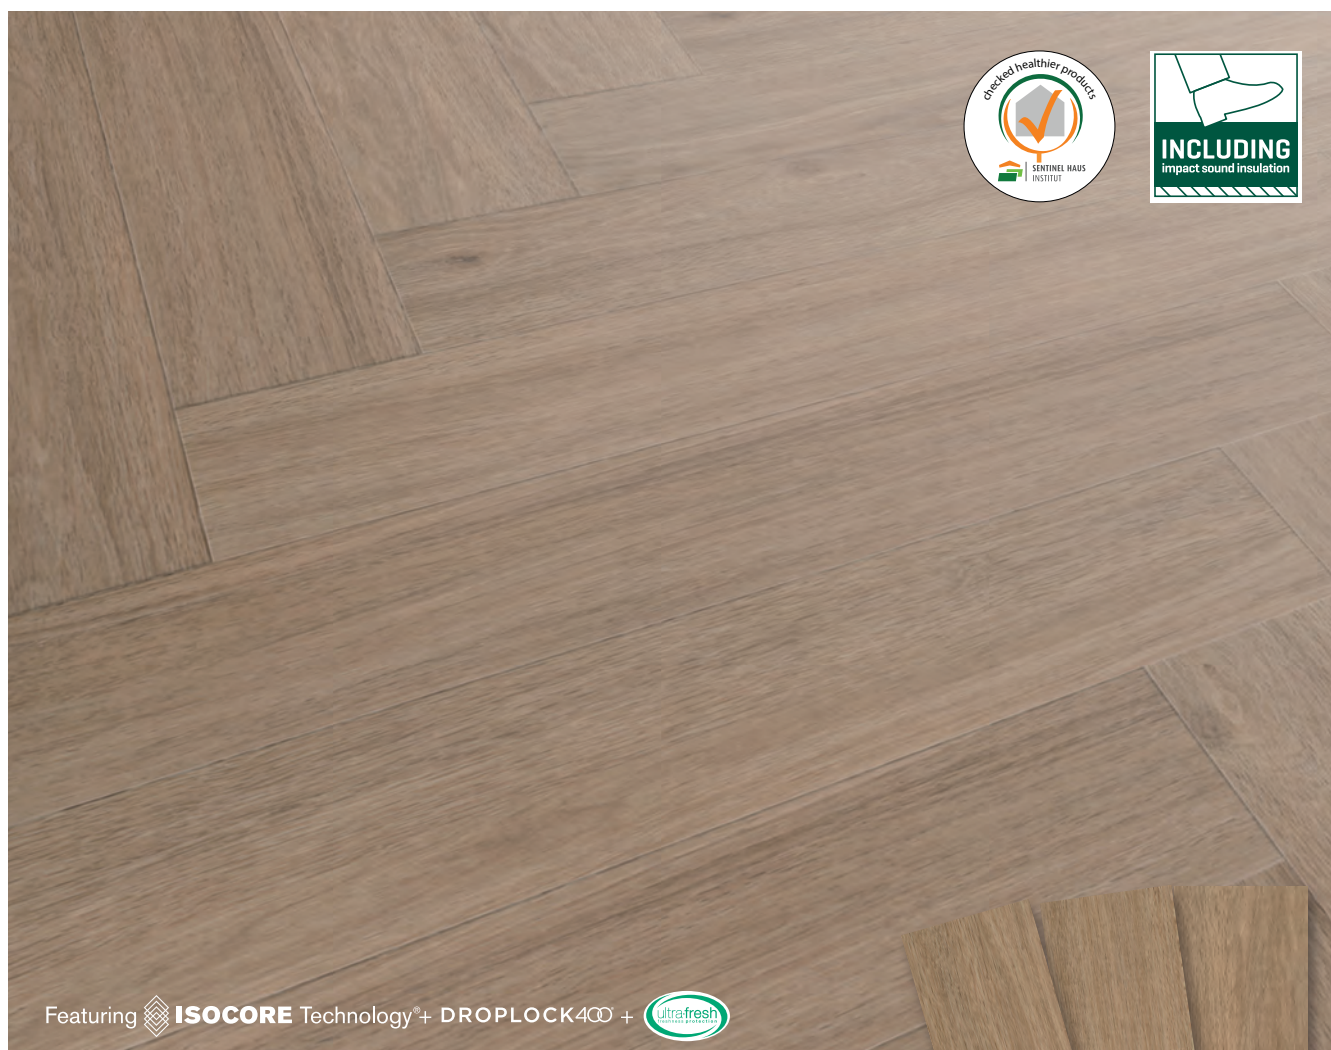

The pictures may differ in color from the original product.

BRETAGNE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33


Note before laying:



- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

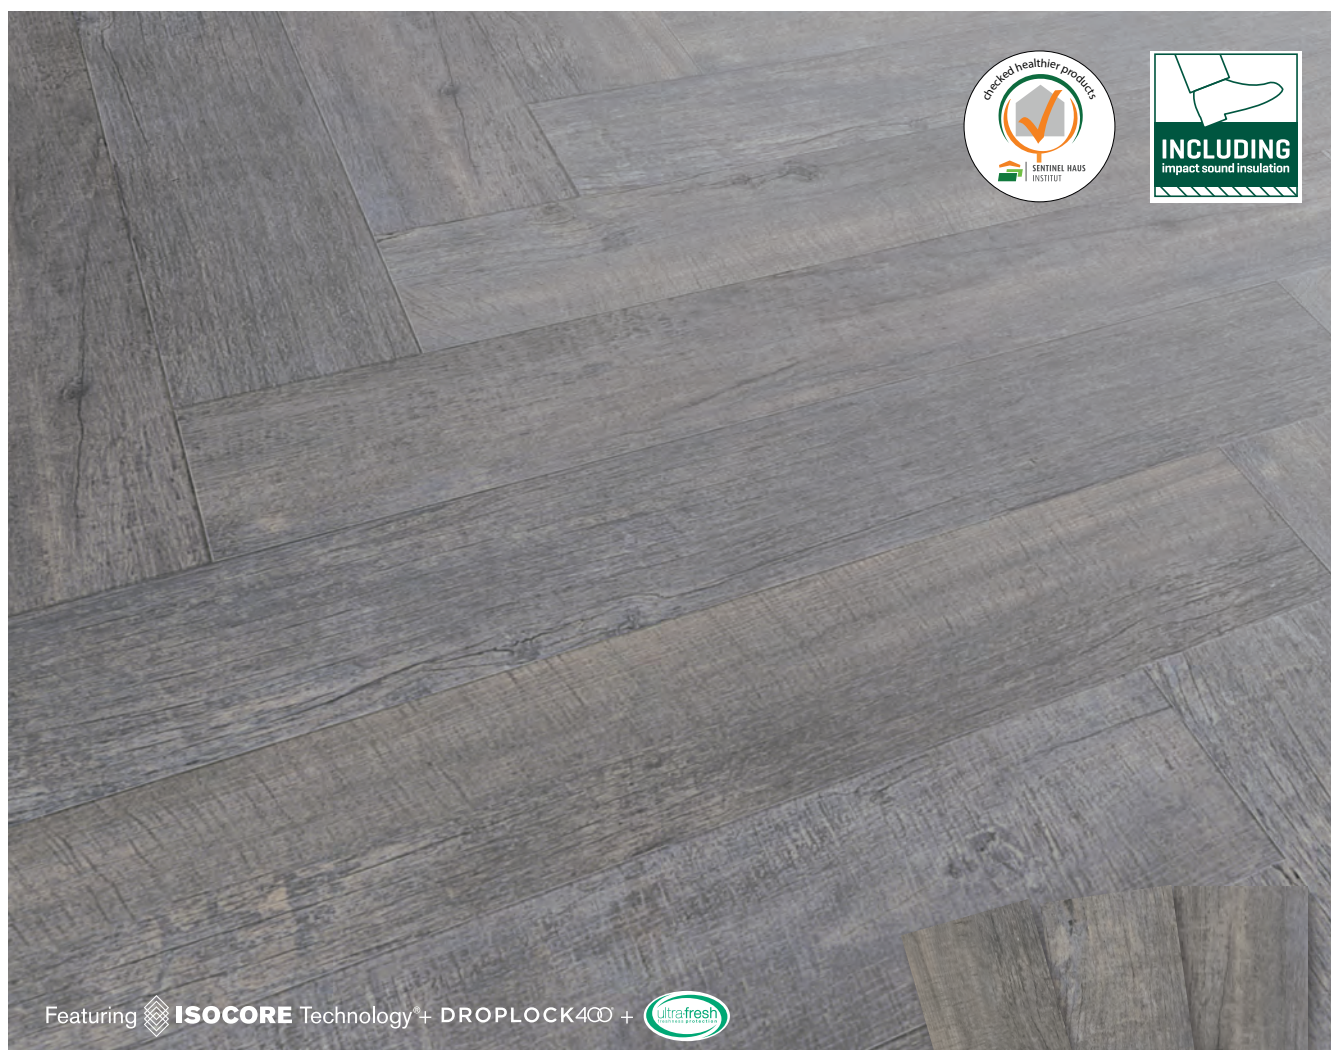Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHBO11117	106202963	SLY Herringbone, Bretagne, 8 mm	7640165926543	36



Featuring  **ISOCORE** Technology* + **DROPLOCK400** + 

The pictures may differ in color from the original product.

CORSE

- ◇ Natural wood look (Sawcut)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

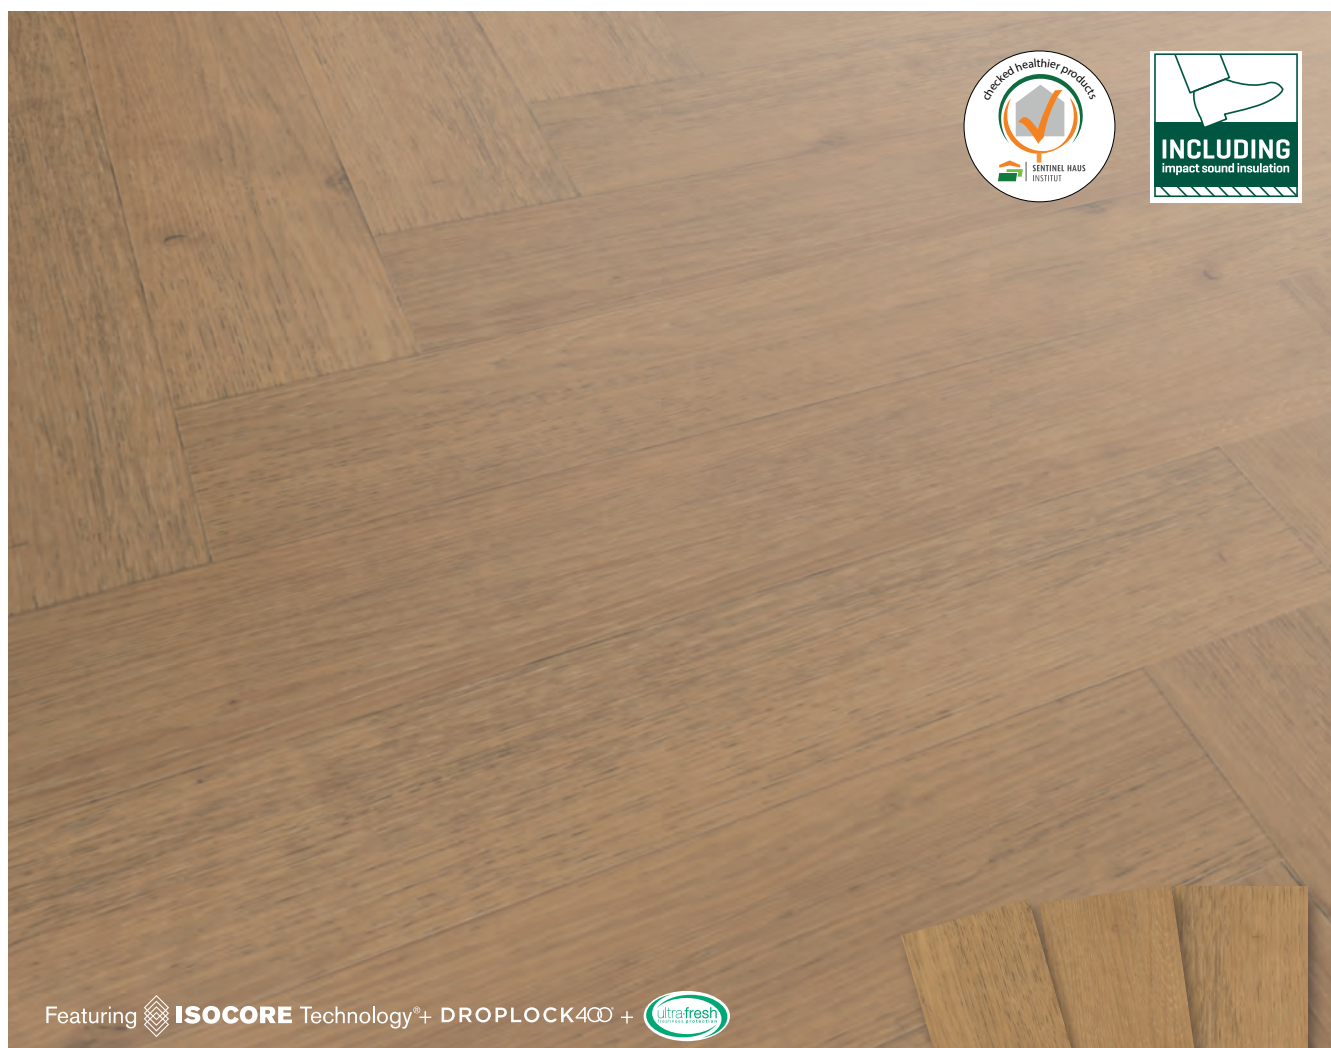

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB1128519	106202965	SLY Herringbone, Corse, 8 mm	7640165926550	36



Featuring  **ISOCORE Technology[®]+** **DROPLOCK400** + 

The pictures may differ in color
from the original product.

NORMANDIE

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:



- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB1275117	106202967	SLY Herringbone, Normandie, 8 mm	7640165926567	36



Featuring  **ISOCORE** Technology® + **DROPLOCK400** + 

The pictures may differ in color from the original product.

ALSACE

- ◇ Natural wood look (Natural Timber)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 8 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 720 x W 120 mm
- ◇ Carton content 24 tiles = 2,074 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 400 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
IHB129415	106202969	SLY Herringbone, Alsace, 8 mm	7640165926574	36