



The pictures may differ in color
from the original product.

Markham Oak Medium


- ◇ Natural wood look
- ◇ Quiet and warm underfoot
- ◇ Only 5 mm mounting height
- ◇ Wear layer 0,5 mm
- ◇ 1210 x 190 mm (L x W)
- ◇ Carton content = 8 planks = 1,84 m²
- ◇ 100% recyclable
- ◇ Phthalates free
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A +)
- ◇ DIBT certified
- ◇ Sound reduction up to 6 dB
- ◇ Utilization class 33/42

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 18 ° C to 24 ° C

Points to note about the configuration:

- If underlay required: flameproof, vinyl approved (at least 400 kPa/m², 1.5 mm, non-adhesive)
- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 8-10 mm
- Maximum field size 10 x 10 m

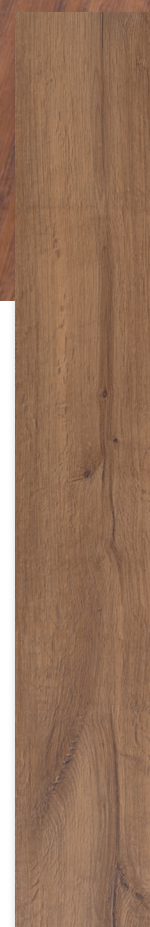

Decor	Article No.	Description	EAN	Pack/Pallet
72513	106200126	Starclik Project, Markham Oak Med, 5 mm	0088969725134	32



The pictures may differ in color from the original product.

Slam Oak

- ◇ Natural wood look
- ◇ Quiet and warm underfoot
- ◇ Only 5 mm mounting height
- ◇ Wear layer 0,5 mm
- ◇ 1210 x 190 mm (L x W)
- ◇ Carton content = 8 planks = 1,84 m²
- ◇ 100% recyclable
- ◇ Phthalates free
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A +)
- ◇ DIBT certified
- ◇ Sound reduction up to 6 dB
- ◇ Utilization class 33/42

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 18 ° C to 24 ° C

Points to note about the configuration:

- If underlay required: flameproof, vinyl approved (at least 400 kPa/m², 1.5 mm, non-adhesive)
- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 8-10 mm
- Maximum field size 10 x 10 m

Decor	Article No.	Description	EAN	Pack/Pallet
79316	106200101	Starclik Project, Slam Oak, 5 mm	7640165927359	32



The pictures may differ in color from the original product.

Rustic Hickory (2-strip)

- ◇ Natural wood look
- ◇ Quiet and warm underfoot
- ◇ Only 5 mm mounting height
- ◇ Wear layer 0,5 mm
- ◇ 1210 x 190 mm (L x W)
- ◇ Carton content = 8 planks = 1,84 m²
- ◇ 100% recyclable
- ◇ Phthalates free
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A +)
- ◇ DIBT certified
- ◇ Sound reduction up to 6 dB
- ◇ Utilization class 33/42

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 18 ° C to 24 ° C

Points to note about the configuration:

- If underlay required: flameproof, vinyl approved (at least 400 kPa/m², 1.5 mm, non-adhesive)
- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 8-10 mm
- Maximum field size 10 x 10 m



Decor	Article No.	Description	EAN	Pack/Pallet
66316	106200106	Starclik Project, Rustic Hickory, 5 mm	0088969666314	32