



Glacier Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203757	M86264L-018B	Strong SPC Variant, Glacier Oak	7640165929339	36



Zion Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203756	M86133-003	Strong SPC Variant, Zion Oak	7640165929322	36



The pictures may differ in color from the original product.

Yosemite Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203755	M81243L-6	Strong SPC Variant, Yosemite Oak	7640165929315	36



The pictures may differ in color from the original product.

Yellowstone Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203754	M86264L-005	Strong SPC Variant, Yellowstone Oak	7640165929308	36



Arches Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203753	M86264L-001	Strong SPC Variant, Arches Oak	7640165929292	36



Grand Canyon Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203752	M86264L-012	Strong SPC Variant, Grand Canyon Oak	7640165929285	36



Grand Teton Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:


- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203751	M86264L-006	Strong SPC Variant, Grand Teton Oak	7640165929278	36

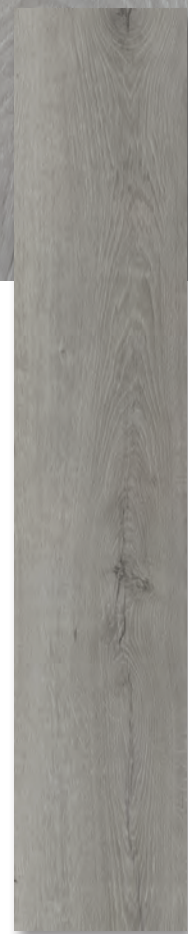

The pictures may differ in color from the original product.

Bryce Canyon Oak

- ◇ Synchronized pore optics (EIR)
- ◇ Integrated underlay mat
- ◇ Endless decor variation
- ◇ Large areas can be laid (up to 400 m²)
- ◇ Dimensionally stable & water resistant
- ◇ Only 4,8 mm construction height
- ◇ Format: 1220 x 230 mm
- ◇ Wear layer: 0,3 mm
- ◇ Carton content: 8 planks = 2,245 m²
- ◇ Suitable for hot water and electric underfloor heating
- ◇ Patented Uniclic connection
- ◇ Low emissions (Certified A+)
- ◇ Utilization class 23/31
- ◇ Free from phthalates and plasticizers

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 13°C to 32°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do **not** use an additional underlay mat.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203750	M86264L-010	Strong SPC Variant, Bryce Canyon Oak	7640165929261	36