



CROSS-SECTION

1. Transparent wear layer
2. High resolution decor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

KAMPTAL

- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203600	MO8556L-12	Strong SPC Multilayer Plus, Kamptal	7640165925225	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

BÖDMEREN

- ◊ Natural wood look
- ◊ Can be laid on large areas (400 m²)
- ◊ Water resistant
- ◊ Only 6,5 mm mounting height
- ◊ Vinyl- and wear layer 1,2/0,55 mm
- ◊ Format 1524 x 228 mm – Large size!
- ◊ Carton content = 5 planks = 1,737 m²
- ◊ Suitable for electric underfloor heating
- ◊ Patented click connection
- ◊ Low Emission (Certified A +)
- ◊ Integrated underlay mat
- ◊ Step & room sound reduction (18 dB)
- ◊ Utilization class 23 / 32
- ◊ Phthalate and plasticizer free


Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203601	MO625L-1	Strong SPC Multilayer Plus, Bödmeren	7640165925232	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

HEXENBERG

- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:


- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203602	MO8556L-9	Strong SPC Multilayer Plus, Hexenberg	7640165925249	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

GRODA


- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expension joints.
- Do not use an additional underlay mat.

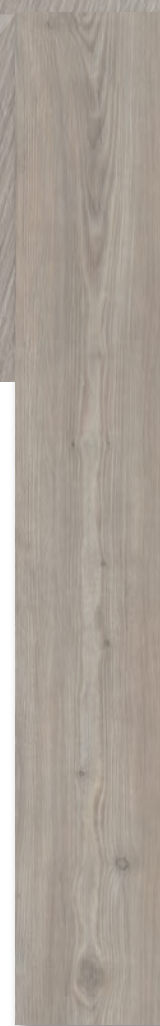

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203603	MO8624L-2	Strong SPC Multilayer Plus, Groda	7640165925256	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

HAINICH

- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:


- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203604	ORGW-624L-1	Strong SPC Multilayer Plus, Hainich	7640165925263	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

THIEMSBURG


- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.


Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.

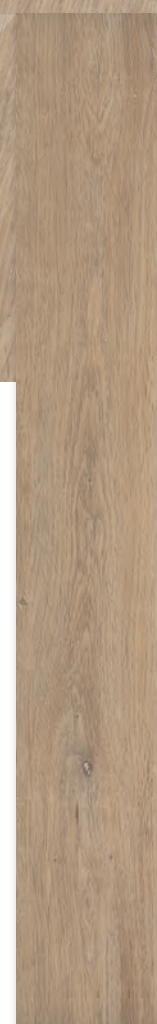

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203605	MY058-04	Strong SPC Multilayer Plus, Thiemsburg	7640165925270	36



CROSS-SECTION

1. Transparent wear layer
2. High resolution décor film
3. Vinyl backing
4. SPC Core (Stone Polymer Composite)
5. Click System
6. Vinyl backing
7. Integrated noise-absorbing underlayment

BUCURA


- ◇ Natural wood look
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 6,5 mm mounting height
- ◇ Vinyl- and wear layer 1,2/0,55 mm
- ◇ Format 1524 x 228 mm – Large size!
- ◇ Carton content = 5 planks = 1,737 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented click connection
- ◇ Low Emission (Certified A +)
- ◇ Integrated underlay mat
- ◇ Step & room sound reduction (18 dB)
- ◇ Utilization class 23 / 32
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 18°C to 24°C.

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.
- Do not use an additional underlay mat.

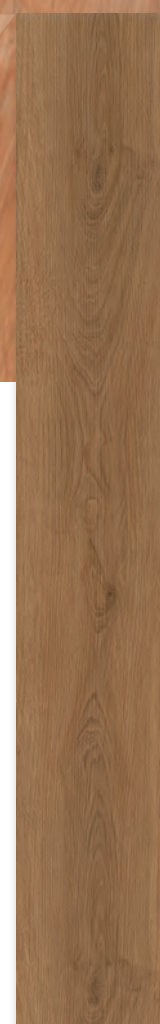

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203606	MB2210-18	Strong SPC Multilayer Plus, Bucura	7640165925294	36