



MISSISSIPPI OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203700	ST190L-09	Strong SPC Structure: Mississippi Oak	7640165927557	33



ALABAMA OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203701	STW3632W-45	Strong SPC Structure: Alabama Oak	7640165927625	33



CAROLINA OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203702	STW3632W-22	Strong SPC Structure: Carolina Oak	7640165927618	33



KEY WEST OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203704	ST190L-02	Strong SPC Structure: Key West Oak	7640165927632	33



LOUISIANA OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203705	STW3632W-15	Strong SPC Structure: Louisiana Oak	7640165927601	33



OKLAHOMA OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expencion joints.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203706	ST190L-07	Strong SPC Structure: Oklahoma Oak	7640165927571	33



GEORGIA OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203703	STW3632W-27	Strong SPC Structure: Georgia Oak	7640165927595	33



VIRGINIA OAK


- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.

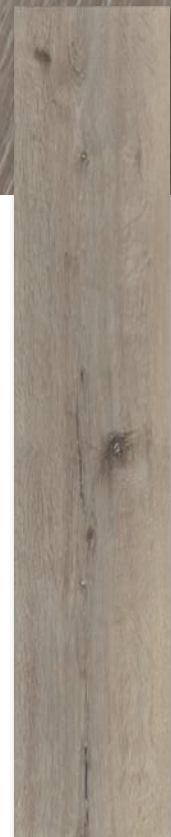

The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203708	ST190L-22	Strong SPC Structure: Virginia Oak	7640165927588	33



TENNESSEE OAK

- ◇ Embossed in register (EIR)
- ◇ Dimensionally stable
- ◇ Endless decor variation
- ◇ Can be laid on large areas (400 m²)
- ◇ Water resistant
- ◇ Only 3,8 mm mounting height
- ◇ Format 1220 x 228 mm
- ◇ Wear layer 0,5 mm
- ◇ Carton content 10 planks = 2,782 m²
- ◇ Suitable for electric underfloor heating
- ◇ Patented I4F click connection
- ◇ Low Emission (Certified A +)
- ◇ Utilization class 23/33
- ◇ Phthalate and plasticizer free

Note before laying:

- Amount needed + 10% of the area.
- Subfloor clean, hard, flat, stable and firm.
- Uneven surface = max 3 mm per 1,2 m.
- Acclimatize the planks horizontally in the room for at least 48h!
- **Important:** Room temperature = floor temperature during installation
- Use temperature 0°C to 60°C.
- The underlay mat need to have a pressure resistance of at least 600 kPa, maximum 1,5 mm thickness and maximum 0,5 mm unevenness.
Recommendation: dB Cover LVT/SPC 1.5

Note during laying:

- Linoleum and wood-based subfloors require decoupling with 0,2 mm PE foil!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of 6-8 mm.
- Max 20 x 20 m (400 m²) without expansion joints.



The pictures may differ in color from the original product.

Article No.	Decor No.	Description	EAN	Pack/Pallet
106203707	STW3632W-48	Strong SPC Structure: Tennessee Oak	7640165927564	33